


END-CARRIAGES FOR BRIDGE CRANES


Wheel groups
DGT SERIES
Offset geared-motor
DGP SERIES

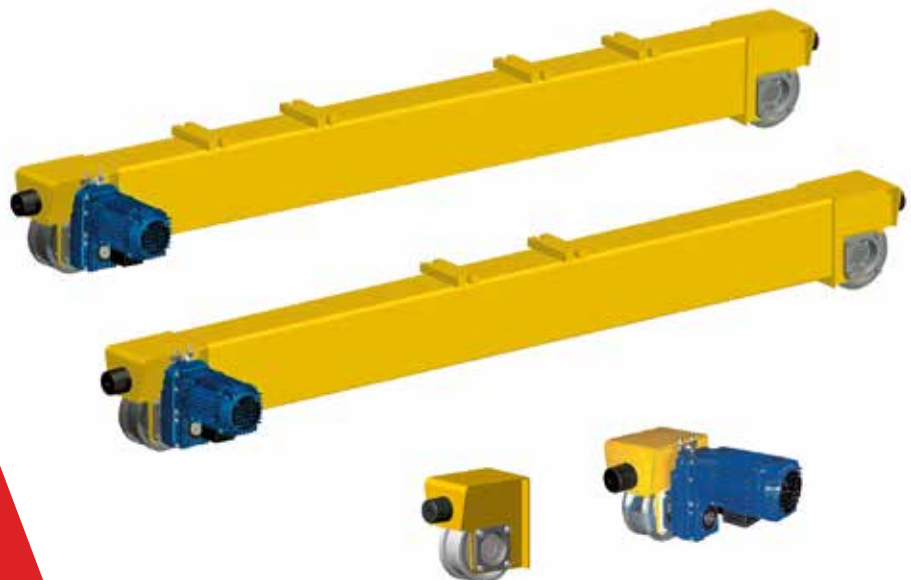

END-CARRIAGES FOR BRIDGE CRANES

The bridge crane end-carriages, equipped with "DGT" series wheel groups, coupled with "DGP" series offset geared motors, represent the most convenient offer for worldwide market requirements for handling masses up to 66,000 kg.

The bridge crane end-carriages, a completion of the range of DRH series electric wire rope hoists and DMK electric chain hoists, appreciated worldwide, complete the range and solutions offered by Donati Sollevamenti, with a view to always supplying the best solution to its customers while safeguarding the quality / price / performance ratio.

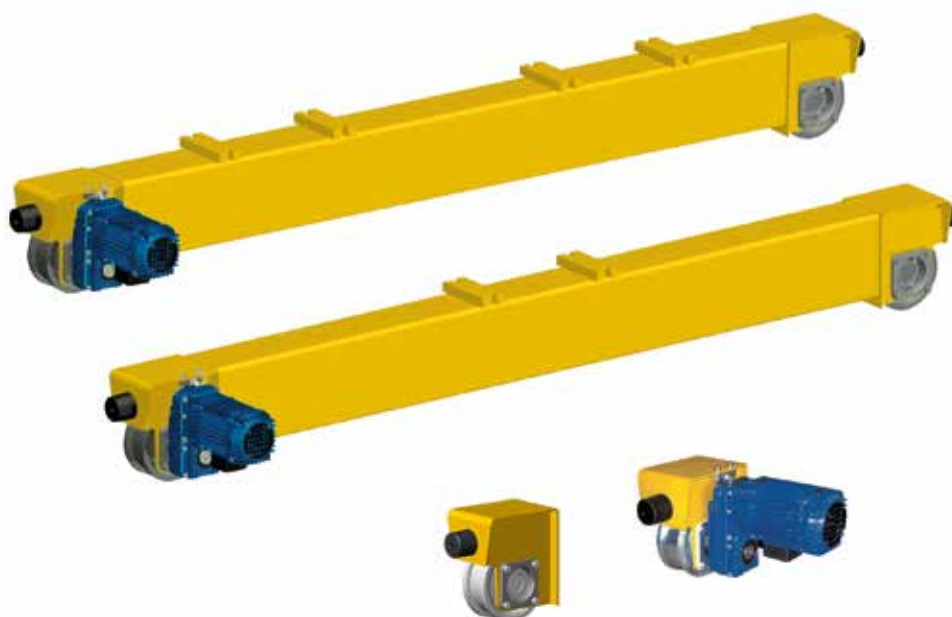

MAX

66.000 KG

The offer most in line with the worldwide market's needs for handling masses up to 66,000 kg protecting the customer's convenience



CONFORMITY TO NORMS AND REGULATIONS

APPLICABLE LEGISLATION

The bridge crane end-carriages are designed and produced by DONATI SOLLEVAMENTI S.r.l. in compliance with the "Essential Safety Requirements" stated in Attachment I of the Machinery Directive 2006/42/CE and are introduced onto the market accompanied by the Declaration of incorporation found in Attachment II B of the Directive.

APPLICABLE NORMS AND REGULATIONS

The following norms and technical principles have also been taken into consideration in the design and manufacturing of the **end-carriages for bridge cranes**:

- ▶ EN ISO 12100/2010 "Fundamental concepts on general engineering principles"
- ▶ EN ISO 13849-1/2008 "General principles for design"
- ▶ EN 60529/97 "Degrees of protection for casings (IP Codes)"
- ▶ ISO 4301-1/88 "Classifications for lifting equipment"
- ▶ ISO 8306/85 "Tolerances for cranes and tracks"
- ▶ FEM 1.001/98 "Calculations for lifting equipment"
- ▶ FEM 9.511/86 "Classification of mechanisms"
- ▶ FEM 9.683/95 "Criteria of choice for lifting and travel motors"
- ▶ FEM 9.755/93 "Safety work periods"



SERVICE CLASSIFICATION:

The structural elements and mechanisms on the **end-carriages for bridge cranes** are classified in various service groups, in conformity with specifications stipulated under ISO 4301.

PROTECTION AND SHEATHING OF ELECTRICAL PARTS:

- ▶ Sliding motors: protection IP55 (motor) - IP23 (brake); class "F" insulation
- ▶ Limit switch: minimum protection IP65; max. insulation voltage 500 V
- ▶ Protections and insulations differing from the standard, which can be supplied on request.

ELECTRICAL POWER:

- ▶ The **end-carriages for bridge cranes** are designed to be powered through three-phase alternating current: 400 V - 50Hz in accordance with IEC 38-1.
- ▶ Different voltage and frequency specifications from the standard can be supplied on request.

ENVIRONMENTAL CONDITIONS FOR STANDARD USAGE:

- ▶ Operating temperature: minimum - 10° C; maximum + 40°C
- ▶ Maximum relative humidity: 80% - Maximum altitude 1000 m above sea level
- ▶ Standard **end-carriages for bridge cranes** must be installed in a well-ventilated working environment, free of corrosive steams (acidic steams, saline mists, etc.), and are designed to operate in a covered environment, protected from atmospheric elements.
- ▶ Special machine models designed for non-standard environmental conditions, or for operation outdoors, can be supplied on request.

NOISE EMISSIONS - VIBRATIONS:

- ▶ Noise emission levels emanating from the **end-carriages** during running operations, whether empty or fully loaded, are in all cases inferior to a value of **80 dB (A)**, as measured at a distance of 1 m and 1.6 m from the ground. The incidence of environmental characteristics such as the transmission of sound through metallic structures, reflection caused by combined machinery and surrounding walls, is not taken into consideration in the value indicated.
- ▶ Vibrations produced by the **end-carriages** during running operations are not considered dangerous for the health and wellbeing of personnel operating the lifting equipment on which the units are installed.



END-CARRIAGES FOR BRIDGE CRANES

DONATI **end-carriages** are designed for handling operations on bridge crane rails:

- ▶ at single running speed from 3.2 to 25 m/min;
- ▶ at two running speeds, from 12.5/3.2 to 80/20 m/min;

Operating on:

- ▶ single girder, with a capacity of up to 20,000 kg and gauge of up to 25 m;
- ▶ double girder, with a capacity of up to 40,000 kg and gauge of up to 27 m.

Designed and built on the principle of modular components assembled together in relation to their specific use, they are equipped with **drive units** comprising “DGT” series wheel groups, which are combined with “DGP” series offset geared motors.

They are configured in 6 sizes, where the basic components are:

- ▶ 6 “DGT” series drive wheel group sizes
(Ø 125, Ø 160, Ø 200, Ø 250, Ø 315 and Ø 400/400 R)
- ▶ 4 “DGP” series offset reducers sizes
(DGP 0, DGP 1, DGP 2 and DGP 3)
- ▶ 4 self-braking motors sizes
(motor 71, motor 80, motor 100 and motor 112)



OPERATING LIMITATIONS FOR END-CARRIAGES ON SINGLE GIRDER OR DOUBLE GIRDER BRIDGE CRANES, IN RELATION TO SPAN

END-CARRIAGES TYPE			SPAN (m) SINGLE GIRDER M OR DOUBLE GIRDER B BRIDGE CRANE																											
SIZE "DGT"	WHEEL																													
	Ø R (mm)	BASIS PR (mm)	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27						
1	125	1800	M																											
		2400	B										M	B																
		3300																		M	B									
2	160	1800	M																											
		2400	B										M	B																
		3300																		M	B									
3	200	2100	M																											
		2700	B												M	B														
		3600																		M	B									
4	250	2100	M																											
		2700	M	B	B								M	B																
		3600																		M	B									
		3600 R																		M										
5	315	2400	M																											
		3900																	B											
6	400	3900																		B										
	400R	3900 R		B																										

"DGT" WHEELS		"DGP" SERIES OFFSET GEARED MOTORS			
SIZE	Ø (mm)	"DGP" REDUCERS SIZE 0	"DGP" REDUCERS SIZE 1	"DGP" REDUCERS SIZE 2	"DGP" REDUCERS SIZE 3
1	125	Motor size 71		=	=
2	160			=	=
3	200	=	Motor size 71	Motor size 80	=
4	250	=			=
5	315	=	=	Motor size 80	Motor size 100
6	400	=	=	=	Motor size 112
	400R	=	=	=	


COMPONENTS ON END-CARRIAGES FOR BRIDGE CRANES

THE MAIN COMPONENTS ON END-CARRIAGES FOR BRIDGE CRANES ARE THE:


END-CARRIAGE FRAMEWORK:

- The load-bearing structure is made from a rectangular tubular section.
- The bridge crane girders are fixed to the end-carriage structure using a system of high-resistance bolts and a pin centring system.

END-CARRIAGE FOR SINGLE GIRDER BRIDGE CRANE

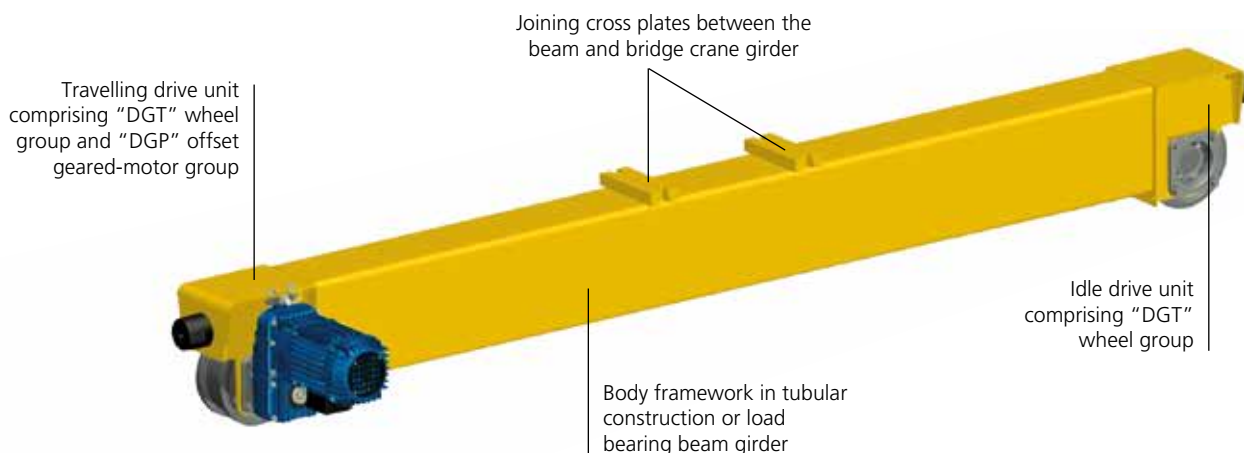


END-CARRIAGE FOR DOUBLE GIRDER BRIDGE CRANE

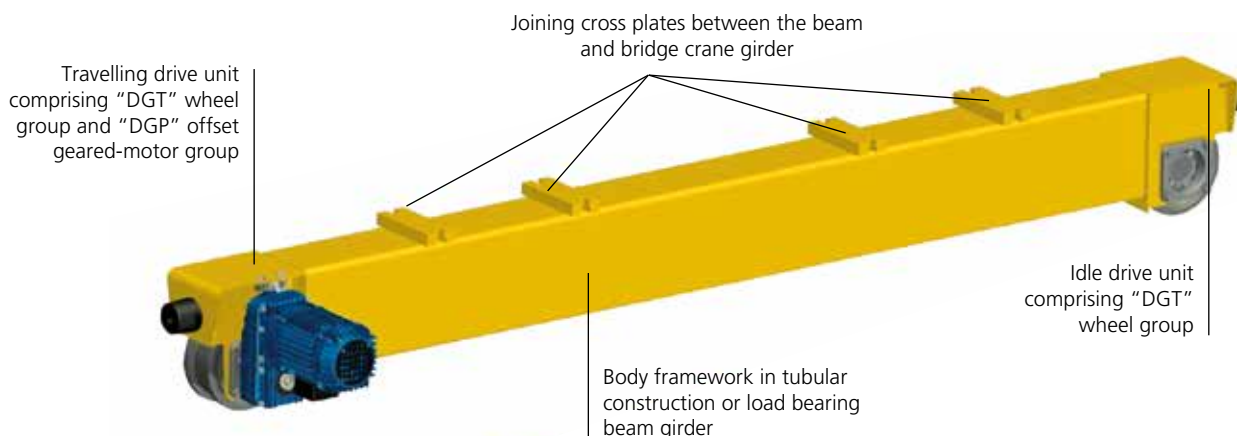

"DGT" SERIES WHEEL GROUPS

- ▶ Drive wheels Ø 125, Ø 160, Ø 200, Ø 250 and Ø 315 are carbon steel moulded. Sliding wheels Ø 400 and Ø 400 R are in spheroidal cast iron.
- ▶ All wheels groups revolve on permanently lubricated radial bearings, with the exception of the extra load capacity Ø 400 R wheel group, which is fitted with roller bearings.
- ▶ Available in idle operation or ready for drive operation combined with an offset geared-motor.
- ▶ In drive operation, the direct connection is coaxial between the offset geared-motor output shaft and the grooved hub on the drive wheel ensures a high level of operating safety and reliability.
- ▶ The wheel group is available as standard with a doubleflange version and can, on request, be supplied with different sliding band widths depending on the type of rail it runs on.
- ▶ Both in idle and drive operation, the wheel groups are supported and contained within an electro-welded steel structure that acts as a support casing for the entire group, and as a joining element between the end carriage frame on which the wheel group is assembled.

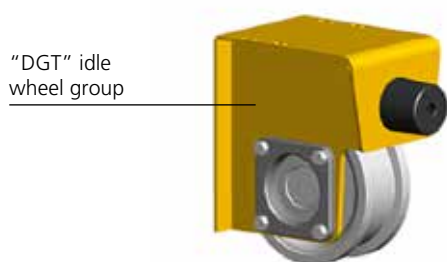


THE CONNECTION PLATE (SINGLE GIRDER) OR PLATES (DOUBLE GIRDER) FIX THE END-CARRIAGE TO THE CRANE'S GIRDER OR GIRDERS:

Specially designed connection plates fix the end-carriages to the girder/s of the bridge crane. Built in steel plating in different sizes, they are welded to the bridge crane girders, whether tubular or plated sectioned, laterally joined or fixed to the travelling beam structures.

"DGP" SERIES OFFSET GEARED-MOTORS

- ▶ **Reducers** are designed as an "offset geared-motor" type with a concave shaft, featuring parallel axes with two or three stages of reduction, and permanent oil-bath lubrication.
- ▶ Engineered with cylindrical high resistance steel gears, featuring spiral teething, heat-treated, entirely supported on ball bearings.
- ▶ Sized to resist a lifetime of stress and wear, in accordance to the pertinent ISO service group.
- ▶ The connection between the geared-motor and drive wheel is guaranteed by a slotted shaft connecting the holes on both parts, while the geared-motor fastened to the wheel group makes use of a system comprising a reaction arm fastened to the wheel group, and an elastic counter bearing with rubber buffers and a setscrew. The entire geared-motor-wheel connection system guarantees both high quality running operation and maximum duration over time with low maintenance, thanks to the elimination of rigid connections.
- ▶ **The electric motors** are asynchronous, featuring progressive start-up, with standard ventilation, selfbraking with axial shifting of the rotor guaranteeing fast, reliable mechanical braking.
- ▶ Conical brakes are fitted with asbestos-free brake lining, featuring an extended braking surface.
- ▶ The brake block comprises a fan which ensures proper cooling for the brake and motor, shifting axially with the motor shaft; the brake function is activated automatically in the case of a power outage.
- ▶ The connection between the motor and offset gearedmotor features a joint contained within a couplinghousing.

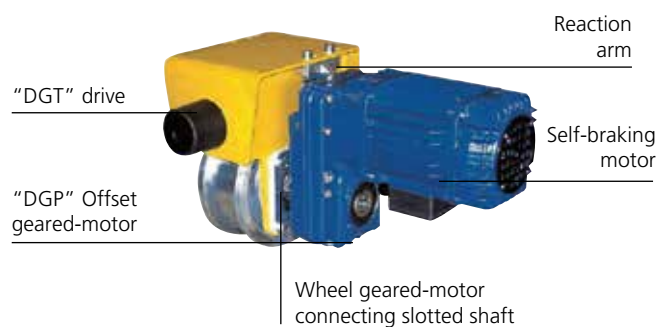

ACCESSORIES (limit switches, towing arms, etc.):

The travel limit switch on the end-carriages, when supplied, is a rotating type with a double cross-rod ensuring for two-speed cranes a dual function of pre-deceleration and stopping in both directions, and is housed on the DGT drive unit.

TECHNICAL SPECIFICATIONS AND OPERATING LIMITATIONS FOR END-CARRIAGES FOR BRIDGE CRANES

For complete technical specifications on the end-carriages for bridge cranes, in relation to their intended operation, check and match the parameters limiting their operation.

The tables below provide a suitable means of verifying operating limits and specifications for end-carriages with wheel groups in combination with offset geared-motors and self-braking motors, in relation to the following user specifications for the bridge crane the end-carriages are installed on.

Operating parameters required for selecting end-carriages:

- ▶ type of bridge crane (single girder or double girder);
- ▶ load bearing capacity;
- ▶ span;
- ▶ ISO / FEM service group
- ▶ inflection point, with a nominal load on the beam's midsection;
- ▶ loads on the wheels;
- ▶ width and shape of the rail;
- ▶ running speed.






SPECIFICATIONS FOR RAILS AND MAXIMUM CONTACT AREA

Square laminated rail UNI 6013 - DIN 1013
Flat laminated rail UNI 6014 - DIN 1017

Burbak type rail - DIN 536

Vignole type rail - UNI 3141



WHEEL SPECIFICATIONS				RAIL			TYPE OF RUNNING RAIL AND MAXIMUM OPERATING CONTACT SURFACE - B (mm)							
TYPE Ø R	MAXIMUM REACTION RX. MAX.	INTERNAL WIDTH (mm)		WIDTH b (mm)		h (mm)	SQUARE LAMINATED - UNI 6013 - DIN 1013 FLAT LAMINATED - UNI 6014 - DIN 1017		BURBAK - DIN 536			VIGNOLE - UNI 3141		
(mm)	(kg)	TIPO	b1	MAX.	MIN.	MIN.	l	b = l - 2r	TIPO	l	b = l - 2r	TIPO	l	b = l - 4/3r
125	3.670 36 kN	standard	50	40	35	30	40	38	=	=	=	=	=	=
		maximum	60	50	45	30	50	48	A 45	45	37	21 - 27	50	34
		special	70	60	55	30	60	58	A 55	55	45	36	60	44
160	4.893 48 kN	standard	55	45	40	30	40	38	A 45	45	37	=	=	=
		maximum	65	55	50	30	50	48	A 55	55	45	21 - 27	50	34
		special	80	70	65	30	70	68	A 65	65	53	46 50	65 67	46 49
200	7.340 72 kN	standard	60	50	45	30	50	48	A 45	45	37	21 - 27	50	34
		maximum	70	60	55	30	60	58	A 55	55	45	30 36	56 60	40 44
		special	90	80	75	30	80	78	A 75	75	59	60	72 ⁽¹⁾	55
250	10.805 106 kN	standard	70	60	55	30	60	58	A 55	55	45	30 36	56 60	40 44
		maximum	80	70	65	30	70	68	A 65	65	53	46 50	65 67	46 49
		special	100	90	85	30	90	88	A 75	75 ⁽¹⁾	59	=	=	=
315	14.679 144 kN	standard	75	65	60	40	60	58	A 65	65	53	36 46	60 65	44 47
		maximum	85	75	70	40	70	68	A 75	75	59	50 60	67 ⁽¹⁾ 72	48 55
		special	110	100	95	40	100	98	A 100	100	80	=	=	=
400	18.960 186 kN	standard	85	75	70	40	70	68	A 75	75	59	50 60	67 ⁽¹⁾ 72	48 55
400R	30.580 ⁽²⁾ 300 kN	maximum	95	85	80	40	80	78	=	=	=	=	=	=
		special	115	100	95	40	100	98	A 100	100	80	=	=	=

The clearance between the internal width of the wheel and the maximum rail width must be contained within: slack ≥ 10 mm and ≤ 15 mm

(1) wheel with increased clearance = 18 mm

(2) the Ø 400 R wheel is sized identical to the Ø 400 wheel but allows for an increased reaction due to its roller bearings

Recommended rails appear in red, together with operating contact surface values, verified in relation to maximum static reaction

OPERATING LIMITS FOR WHEELS IN RELATION TO THE RAIL'S OPERATING CONTACT SURFACE AND RUNNING SPEED

The following diagrams (pages 12, 13 and 14) illustrate average admissible reactions $R_{ave.}$ (expressed in kg) on drive unit wheels, in relation to the running speed and to the operating width "b", as specified in the table on page 11. The correct choice of wheel is based on the average effective reaction $R_{ave.}$ effettiva, exerted on the wheel.

This value is derived from the following equation:

$$R_{ave.} = \frac{2 * R_{max.} + R_{min.}}{3}$$

where **R max.** is the most unfavourable load condition, equal to:

$$R_{max.} = \frac{M1}{4} + \left(\frac{M2+P}{2} \right) * \left(1 - \frac{a}{s} \right)$$


while the minimum reaction **R min.** is:

$$R_{min.} = \frac{M1}{4} + \frac{M2}{2} * \frac{a}{s}$$


where: **M1** = crane mass, i.e. its proper weight (crane's weight including accessories), expressed in kg

M2 = hoist/trolley mass, i.e. their proper weight, expressed in kg

P = nominal crane capacity, expressed in kg

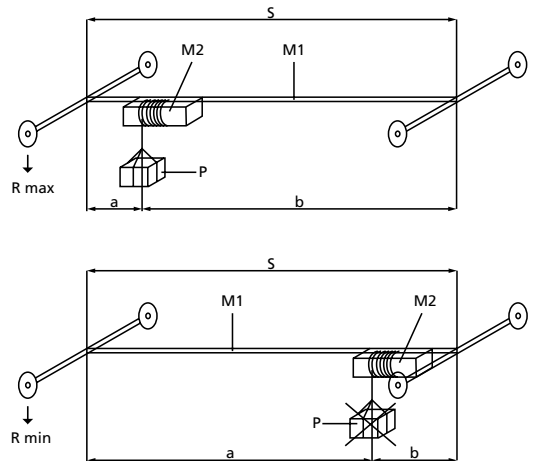

ADMISSIBLE AVERAGE REACTIONS OF WHEELS Ø 125 AND 160, IN RELATION TO THE RAIL WIDTH AND RUNNING SPEED

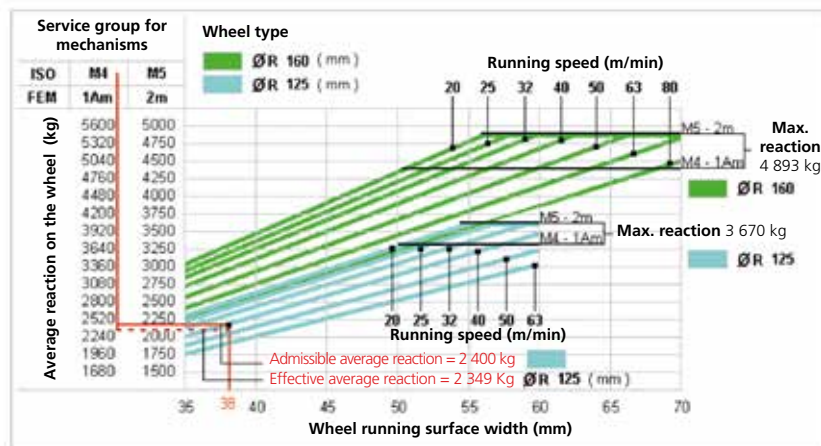


Example of verification of suitability for a Ø 125 wheel
(see example 1 on page 36)

Data calculated:

- ▶ Rail operating width: $b = 38$ mm
- ▶ Travelling speed: 40/10 m/min;
- ▶ Service group: ISO M4 (FEM 1Am)
- ▶ Average effective reaction: $R_{ave.} = 2.349$ kg
- ▶ Maximum effective reaction: $R_{max. eff.} = 3.203$ kg

The average admissible reaction is ≈ 2.400 kg > than the average effective reaction of 2.349 kg the wheel is subjected to;
The maximum admissible reaction is ≈ 3.670 kg > than the maximum effective reaction of 3.203 kg

AVERAGE ADMISSIBLE REACTIONS FROM WHEELS Ø 200 AND 250, IN RELATION TO THE OPERATING WIDTH AND TRAVELLING SPEED

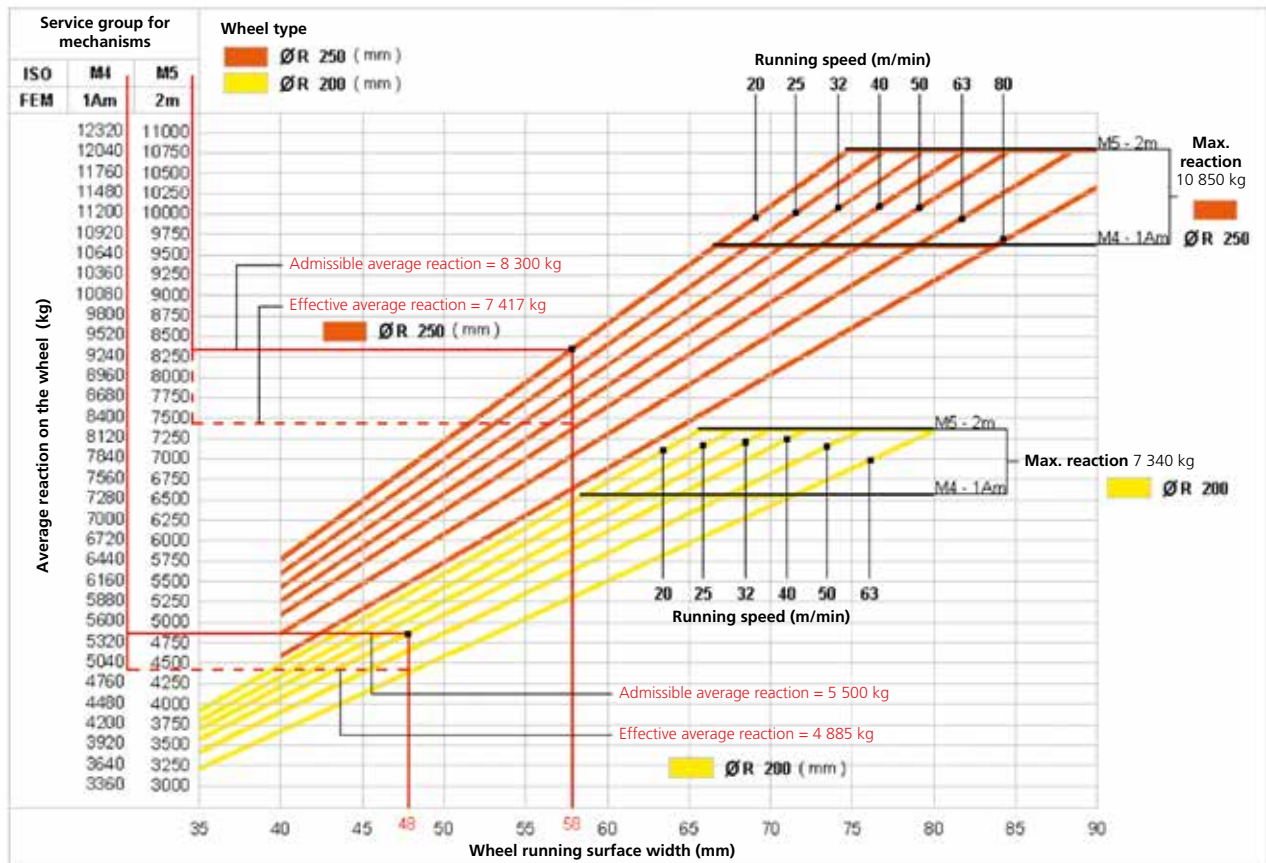

Example of verification of suitability for a Ø 200 wheel (see example 2 on page 26)


Data calculated:

- ▶ Rail operating width: $b = 48$ mm
- ▶ Travelling speed: 40/10 m/min;
- ▶ Service group: ISO M4 (FEM 1Am)
- ▶ Average effective reaction: $R_{ave.} = 4.885$ kg
- ▶ Maximum effective reaction: $R_{max. eff.} = 6.581$ kg

The average admissible reaction is ≈ 5.500 kg > than the average effective reaction of 4.885 kg the wheel is subjected to;

The maximum admissible reaction is $= 7.340$ kg > than the maximum effective reaction of 6.581 kg

AVERAGE ADMISSIBLE REACTIONS FROM WHEELS Ø 315 AND 400, IN RELATION TO THE RAIL WIDTH AND TRAVELLING SPEED

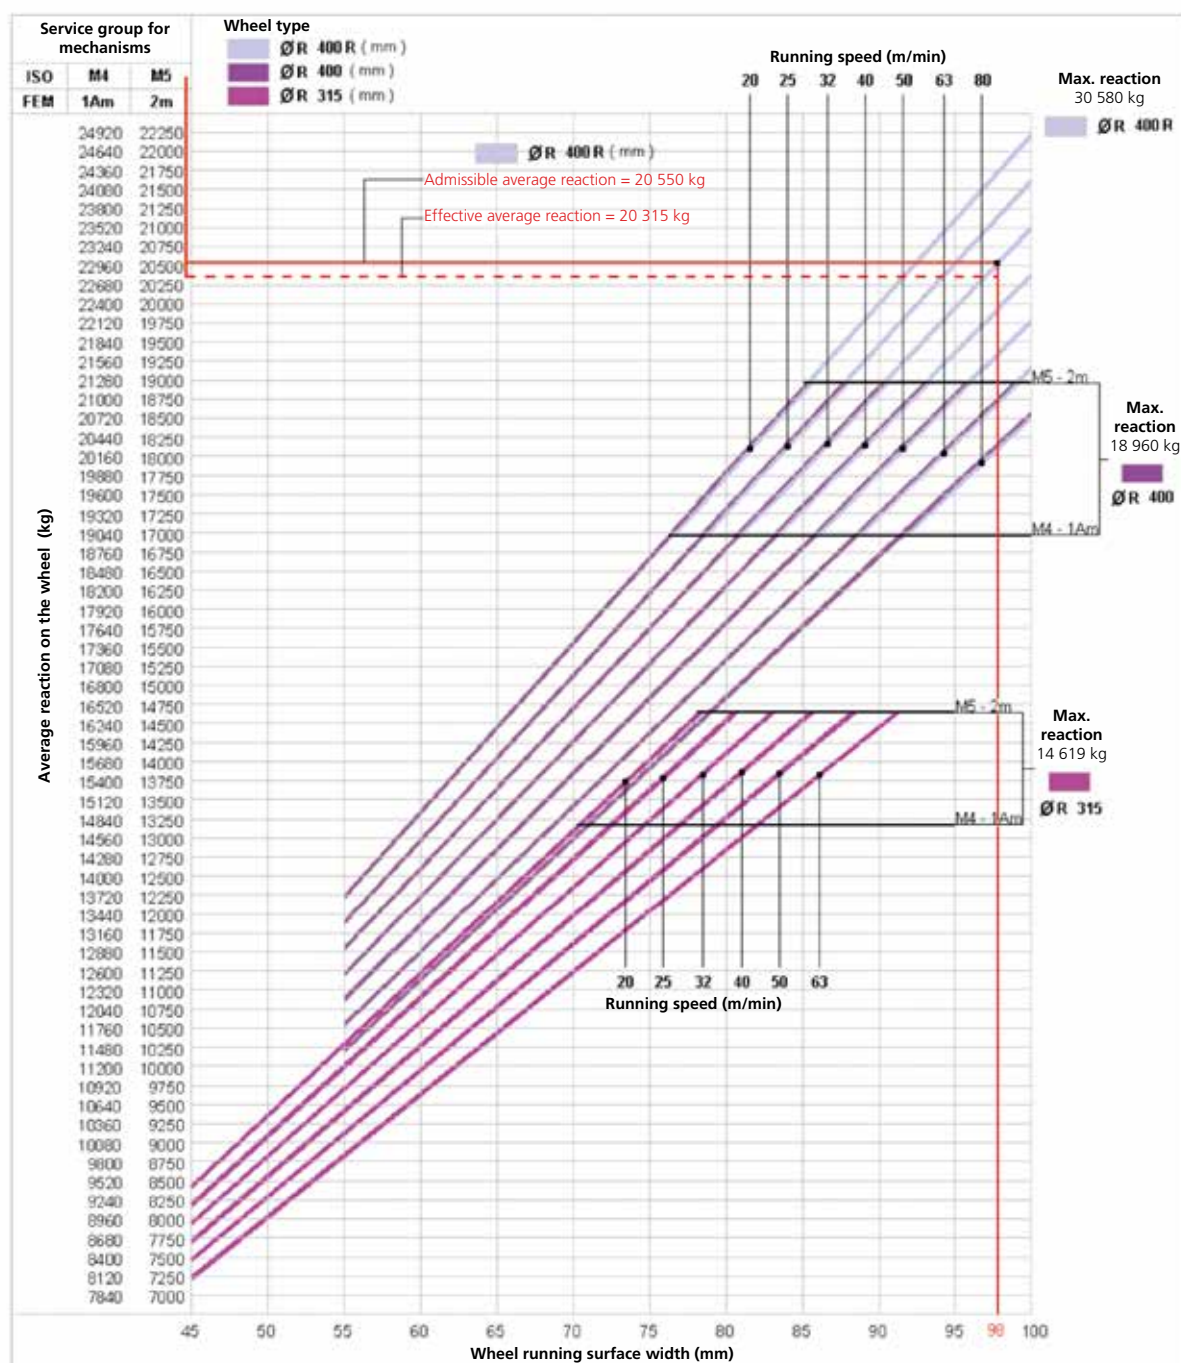


Example of verification of suitability for a Ø 315 wheel (see example 1 on page 26)

Data calculated:

- ▶ Rail operating width: $b = 58 \text{ mm}$
- ▶ Travelling speed: $40/10 \text{ m/min}$;
- ▶ Service group: ISO M5 (FEM 2m)
- ▶ Average effective reaction: $R_{\text{ave.}} = 9.202 \text{ kg}$
- ▶ Maximum effective reaction: $R_{\text{max. eff.}} = 11.963 \text{ kg}$

The average admissible reaction is $9.900 \text{ kg} >$ than the average effective reaction of 9.202 kg the wheel is subjected to;
The maximum admissible reaction is $14.679 \text{ kg} >$ than the maximum effective reaction of 11.963 kg

GEOMETRICAL SPECIFICATIONS BASED ON END-CARRIAGE FOR SINGLE OR DOUBLE GIRDER BRIDGE CRANES

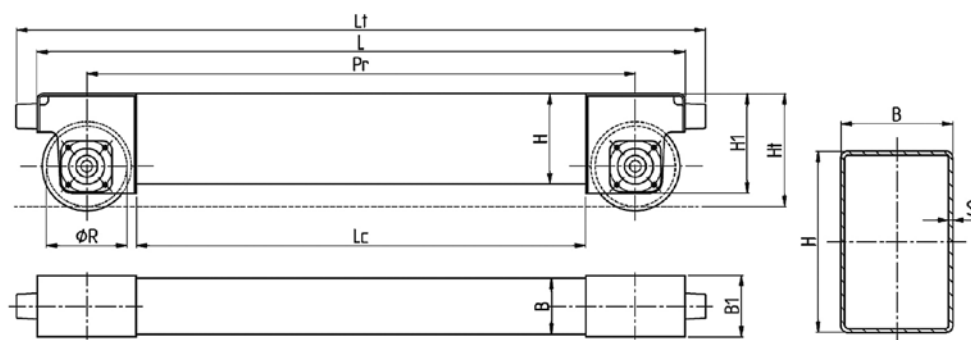

End-carriage construction

Tubular end-carriage
section

END-CARRIAGE TYPE			END-CARRIAGE DIMENSIONAL DATA (mm)									INERTIAL DATA ON TUBULAR SECTION						
SIZE "DGT"	WHEEL		Lc	L	Lt	S	B	H	B1	H1	Ht	WT	JX	WX	JY	WY	AREA	WEIGHT
	Ø R (mm)	BASIS PR (mm)										cm³	cm⁴	cm³	cm⁴	cm³	cm²	kg/m
1	125	1800	1630	1970	2030	5						231.8	2067.0	187.9	811.7	135.3	32.23	25.3
		2400	2230	2570	2630	8	120	220	160	225	233	343.0	3200.0	291.0	1230.0	205.0	51.2	40.2
		3300	3130	3470	3530													
2	160	1800	1590	2010	2110													
		2400	2190	2610	2710	6.3	180	260	180	260	275	524.0	5170.0	397.0	2930.0	325.0	53.4	41.9
		3300	3090	3510	3610													
3	200	2100	1840	2360	2490	6.3						524.0	5170.0	397.0	2930.0	325.0	53.4	41.9
		2700	2440	2960	3090	10	180	260	200	290	315	775.0	7740.0	595.0	4350.0	483.0	82.9	65.1
		3600	3340	3860	3990													
4	250	2100	1790	2410	2540	6.3						681.0	7830.0	522.0	4190.0	419.0	61.0	47.9
		2700	2390	3010	3140													
		3600	3290	3910	4040	10	200	300	230	335	370	1020.0	11820.0	788.0	6280.0	628.0	94.9	74.5
		3600 R	3290	3910	4040	16						1470.0	17390.0	1160.0	9110.0	911.0	147.0	115
5	315	2400	2010	2790	2950	8						1250.0	16450.0	940.0	9800.0	784.0	92.8	72.8
		3900	3510	4290	4450	12.5	250	350	260	385	437	1840.0	24420.0	1400.0	14440.0	1160.0	142.0	112.0
6	400	3900	3430	4370	4570	12.5	300	400	290	440	495	2590.0	38450.0	1920.0	24610.0	1640.0	167.0	131.0
	400R	3900 R	3430	4370	4570	16	300	*410	290	440	495	3180.0	56183.4	3015.0	31187.5	2079.0	234.2	183.8

* Reinforced tubular

END-CARRIAGES FOR SINGLE GIRDER CRANES

OPERATING LIMITATIONS FOR END-CARRIAGES ON SINGLE GIRDER BRIDGE CRANES BASED ON: CAPACITY - ISO/FEM GROUP - SPAN

CAPACITY (kg)	ISO/FEM GROUP	SPAN (m)																						
		6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25			
1000	M4/1Am																							
	M5/2m																							
1250	M4/1Am																							
	M5/2m																							
1600	M4/1Am																							
	M5/2m																							
2000	M4/1Am																1 – 125 – 3300							
	M5/2m																							
2500	M4/1Am																							
	M5/2m																							
3200	M4/1Am																							
	M5/2m																							
4000	M4/1Am																							
	M5/2m																							
5000	M4/1Am																							
	M5/2m																							
6300	M4/1Am																							
	M5/2m																							
8000	M4/1Am																							
	M5/2m																							
10000	M4/1Am																							
	M5/2m																							
12500	M4/1Am																							
	M5/2m																							
16000	M4/1Am																							
	M5/2m																							
20000	M4/1Am																							


Admissible travelling mass for end-carriages on SINGLE GIRDER bridge crane [Travelling mass (kg) = capacity + crane weight + weight of trolley/hoist]

1-125			2-160			3 – 200			4 – 250				5 – 315
1800	2400	3300	1800	2400	3300	2100	2700	3600	2100	2700	3600	3600 R	2400
8.400	7.400	11.100	9.800			15.800		14.800	22.000	24.400	19.000	24.800	28.600

Note: operating limitations determined using Donati components (hoist, trolley, etc.) and sectioned beams sized as per arrow a = Span / 750

END-CARRIAGES FOR SINGLE GIRDER CRANES WITH CONNECTION PLATES TO "BRIDGE GIRDER"

Connection of beam-girder "Lateral" configuration

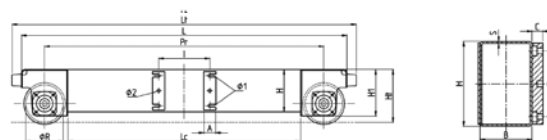


END-CARRIAGE TYPE	BEAM CODES IN RELATION TO MAX. WIDTH SPAN(mm) OF BRIDGE GIRDER									DIMENSIONS (mm) (FOR OTHER DIMENSIONS SEE PAGE 15)					WEIGHT (kg)
	WIDTH MAX.	DIMENSION I	BEAM CODE	WIDTH MAX.	DIMENSION I	BEAM CODE	WIDTH MAX.	DIMENSION I	BEAM CODE	A	C	D	Ø1	Ø2	
1 – 125 – 1800			S118H1..			S118H2..			=						78
1 – 125 – 2400	305	360	S124H1..	370	430	S124H2..	450	510	S124H3..	60	25	165	17	20	126
1 – 125 – 3300			S133H1..			S133H2..			S133H3..						163
2 – 160 – 1800			S218H1..			S218H2..			=						120
2 – 160 – 2400	305	360	S224H1..	370	430	S224H2..	450	510	S224H3..	60	25	190	19	20	146
2 – 160 – 3300			S233H1..			S233H2..			S233H3..						185
3 – 200 – 2100			S321H1..			S321H2..			S321H3..						162
3 – 200 – 2700	360	420	S327H1..	410	480	S327H2..	500	560	S327H3..	80	30	195	21	25	235
3 – 200 – 3600			S336H1..			S336H2..			S336H3..						308
4 – 250 – 2100			S421H1..			S421H2..			S421H3..						210
4 – 250 – 2700	410	480	S427H1..	490	560	S427H2..	565	640	S427H3..	80	30	235	25	25	305
4 – 250 – 3600			S436H1..			S436H2..			S436H3..						373
4 – 250 – 3600 R			S437H1..			S437H2..			S437H3..						507
5 – 315 – 2400	410	500	S524H1..	490	580	S524H2..	615	710	S524H3..	100	40	270	29	32	340

Referred partial codes are applied to couples of end-carriages without counterplates. In case of couples of end-carriages with counterplates, replace letter **H**, in fifth position, with letter **G**. The weights given in the table refer to the individual end-carriage.

END-CARRIAGES FOR SINGLE GIRDER CRANES WITH CONNECTION PLATES TO "BRIDGE GIRDER"

Joining of beam girder in "Supported" configuration

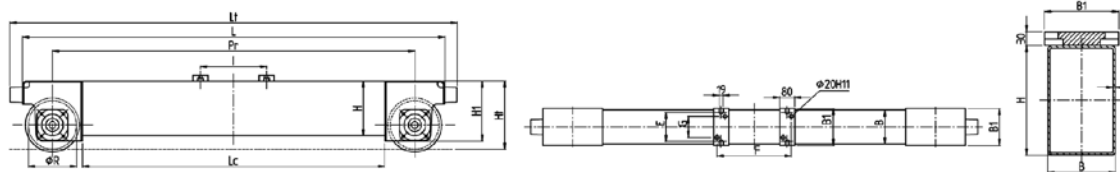


END-CARRIAGE TYPE	BEAM CODES IN RELATION TO MAX. WIDTH SPAN (mm) OF BRIDGE GIRDER											DIMENSION (mm) (FOR OTHER DIMENSIONS SEE PAGE 15)			WEIGHT (kg)	
	WIDTH MAX.	DIMENSION		BEAM CODE	WIDTH MAX.	DIMENSION		BEAM CODE	WIDTH MAX.	DIMENSION		BEAM CODE	A	E		G
		I	F			I	F			I	F					
1 – 125 – 1800				S118V1..				S118V2..				=				79
1 – 125 – 2400	305	360	402	S124V1..	370	430	472	S124V2..	450	510	552	S124V3..	60	120	78	129
1 – 125 – 3300				S133V1..				S133V2..				S133V3..				165
2 – 160 – 1800				S218V1..				S218V2..				=				124
2 – 160 – 2400	305	360	402	S224V1..	370	430	472	S224V2..	450	510	552	S224V3..	60	140	98	150
2 – 160 – 3300				S233V1..				S233V2..				S233V3..				187
3 – 200 – 2100				S321V1..				S321V2..				S321V3..				162
3 – 200 – 2700	360	420	462	S327V1..	410	480	522	S327V2..	500	560	602	S327V3..	80	160	118	232
3 – 200 – 3600				S336V1..				S336V2..				S336V3..				300
4 – 250 – 2100				S421V1..				S421V2..				S421V3..				215
4 – 250 – 2700				S427V1..				S427V2..				S427V3..				305
4 – 250 – 3600	410	480	522	S436V1..	490	560	602	S436V2..	565	640	682	S436V3..	80	190	148	375
4 – 250 – 3600 R				S437V1..				S437V2..				S437V3..				507
5 – 315 – 2400	410	500	542	S524V1..	490	580	622	S524V2..	615	710	752	S524V3..	100	220	178	337

Referred partial codes are applied to couples of end-carriages without counterplates. In case of couples of end-carriages with counterplates, replace letter **V**, in fifth position, with letter **T**. The weights given in the table refer to the individual end-carriage.

END-CARRIAGES FOR SINGLE GIRDER CRANES WITH CONNECTION PLATES TO "BRIDGE GIRDER"

Joining of beam girder in "Lateral + Supported" configuration

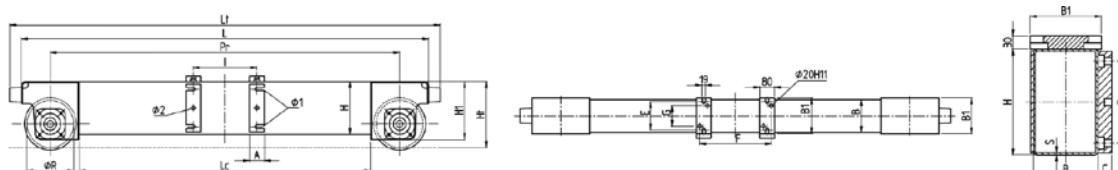

END-CARRIAGE TYPE	BEAM CODES IN RELATION TO MAX. WIDTH SPAN (mm) OF BRIDGE GIRDER											DIMENSION (mm) (FOR OTHER DIMENSIONS SEE PAGE 11)								WEIGHT (kg)	
	WIDTH MAX.	DIMENSION		BEAM CODE	WIDTH MAX.	DIMENSION		BEAM CODE	WIDTH MAX.	DIMENSION		BEAM CODE	A	C	D	E	G	Ø1	Ø2		
		I	F			I	F			I	F										
1 – 125 – 1800				S118N1..				S118N2..				=									84
1 – 125 – 2400	305	360	402	S124N1..	370	430	472	S124N2..	450	510	552	S124N3..	60	25	165	120	78	17	20		132
1 – 125 – 3300				S133N1..				S133N2..				S133N3..									169
2 – 160 – 1800				S218N1..				S218N2..				=									126
2 – 160 – 2400	305	360	402	S224N1..	370	430	472	S224N2..	450	510	552	S224N3..	60	25	190	140	98	19	20		152
2 – 160 – 3300				S233N1..				S233N2..				S233N3..									190
3 – 200 – 2100				S321N1..				S321N2..				S321N3..									170
3 – 200 – 2700	360	420	462	S327N1..	410	480	522	S327N2..	500	560	602	S327N3..	80	30	195	160	118	21	25		242
3 – 200 – 3600				S336N1..				S336N2..				S336N3..									312
4 – 250 – 2100				S421N1..				S421N2..				S421N3..									220
4 – 250 – 2700				S427N1..				S427N2..				S427N3..									313
4 – 250 – 3600	410	480	522	S436N1..	490	560	602	S436N2..	565	640	682	S436N3..	80	30	235	190	148	25	25		382
4 – 250 – 3600 R				S437N1..				S437N2..				S437N3..									515
5 – 315 – 2400	410	500	542	S524N1..	490	580	622	S524N2..	615	710	752	S524N3..	100	40	270	220	178	29	32		350

Referred partial codes are applied to couples of end-carriages without counterplates. In case of couples of end-carriages with counterplates, replace letter **N**, in fifth position, with letter **M**. The weights given in the table refer to the individual end-carriage.

END-CARRIAGES FOR DOUBLE GIRDER CRANES

OPERATING LIMITATIONS FOR END-CARRIAGES ON DOUBLE GIRDER BRIDGE CRANES BASED ON:
CAPACITY - ISO/FEM GROUP - SPAN

CAPACITY (kg)	ISO/FEM GROUP	SPAN (m)																					
		6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27
1000	M4/1Am																						
	M5/2m																						
1250	M4/1Am																						
	M5/2m																						
1600	M4/1Am																						
	M5/2m																						
2000	M4/1Am																						
	M5/2m																						
2500	M4/1Am																						
	M5/2m																						
3200	M4/1Am																						
	M5/2m																						
4000	M4/1Am																						
	M5/2m																						
5000	M4/1Am																						
	M5/2m																						
6300	M4/1Am																						
	M5/2m																						
8000	M4/1Am																						
	M5/2m																						
10000	M4/1Am																						
	M5/2m																						
12500	M4/1Am																						
	M5/2m																						
16000	M4/1Am																						
	M5/2m																						
20000	M4/1Am																						
	M5/2m																						
25000	M4/1Am																						
	M5/2m																						
32000	M4/1Am																						
	M5/2m																						
40000	M4/1Am																						
	M5/2m																						


Admissible travelling mass from beams on DOUBLE GIRDER bridge crane [Travelling mass (kg) = capacity + crane weight + weight of trolley/hoist]

1-125		2-160		3 - 200		4 - 250		5 - 315	6 - 400	6 - 400R
2400	3300	2400	3300	2700	3600	2700	3600	3900	3900	3900 R
9.300	10.400	11.500	13.200	17.100	18.800	25.000	25.500	35.900	46.000	62.000

Note: operating limitations determined using Donati components (hoist, trolley, etc.) and sectioned beams sized as per arrow a = Span / 750

END-CARRIAGES FOR DOUBLE GIRDER CRANES WITH CONNECTION PLATES TO "BRIDGE GIRDERS" "LATERAL" EXECUTION

Joining of beam girders in "Lateral" configuration

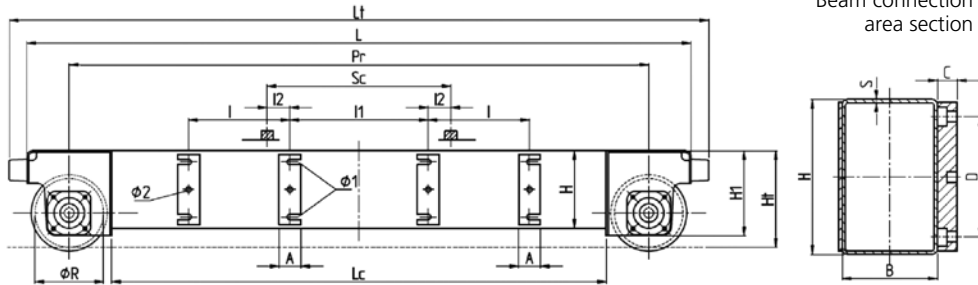

END-CARRIAGES TYPE	BEAM CODES BASED ON THE GAUGE OF THE DOUBLE GIRDER TROLLEY, TYPE OF GIRDERS ON THE BRIDGE CRANE AND MAX. GIRDER SPAN					DIMENSION (mm)								WEIGHT
	DOUBLE GIRDER TROLLEY GAUGE		BRIDGE CRANE GIRDERS		BEAM CODE	(FOR OTHER DIMENSIONS SEE PAGE 15)								
	Sc (mm)		TYPE	MAX. SPAN (mm)		I	I1	I2	A	C	D	Ø1	Ø2	(kg)
1 - 125 - 2400	1000		Box Girder	305	W124H1..	360	870	65	60	25	165	17	20	132
				370	W124H2..	430	865	67.5						
			HE	300	W124HA..	360	640	180						
				300	W124HA..	360	640	180						
	1200		Box Girder	305	W124H4..	360	1070	65						
				370	W124H5..	430	1065	67.5						
1 - 125 - 3300	1000		Box Girder	305	W133H1..	360	870	65	60	25	165	17	20	170
				370	W133H2..	430	865	67.5						
			HE	300	W133H3..	510	805	97.5						
				300	W133HA..	360	640	180						
	1200		Box Girder	305	W133H4..	360	1070	65						
				370	W133H5..	430	1065	67.5						
			HE	300	W133H6..	510	1005	97.5						
				300	W133HD..	360	840	180						
	1400		Box Girder	305	W133H7..	360	1270	65						
				370	W133H8..	430	1265	67.5						
			HE	300	W133H9..	510	1205	97.5						
				300	W133HG..	360	1040	180						
2 - 160 - 2400	1000		Box Girder	305	W224H1..	360	870	65	60	25	190	19	20	152
				370	W224H2..	430	865	67.5						
			HE	300	W224HA..	360	640	180						
				300	W224HA..	360	640	180						
	1200		Box Girder	305	W224H4..	360	1070	65						
				370	W224H5..	430	1065	67.5						
2 - 160 - 3300	1000		Box Girder	305	W224HD..	360	840	180	60	25	190	19	20	190
				300	W224HD..	360	840	180						
			HE	300	W233H2..	430	865	67.5						
				450	W233H3..	510	816	92						
	1200		Box Girder	305	W233HA..	360	640	180						
				300	W233HA..	360	640	180						
			HE	300	W233H5..	430	1065	67.5						
				450	W233H6..	510	1016	92						
	1400		Box Girder	305	W233HD..	360	840	180						
				300	W233HD..	360	840	180						
			HE	300	W233H8..	430	1265	67.5						
				450	W233H9..	510	1216	92						
3 - 200 - 2700	1000		Box Girder	360	W327H1..	420	830	85	80	30	195	21	25	243
				410	W327H2..	480	846	77						
			HE	300	W327HA..	420	580	210						
				300	W327HA..	420	580	210						
	1200		Box Girder	360	W327H4..	420	1030	85						
				410	W327H5..	480	1046	77						
			HE	300	W327HD..	420	780	210						
				300	W327HD..	420	780	210						
	1400		Box Girder	360	W327H7..	420	1230	85						
				410	W327H8..	480	1246	77						
			HE	300	W327HG..	420	980	210						
				300	W327HG..	420	980	210						


END-CARRIAGES FOR DOUBLE GIRDER CRANES WITH CONNECTION PLATES TO “BRIDGE GIRDERS” - “LATERAL” EXECUTION

END-CARRIAGES TYPE	BEAM CODES BASED ON THE GAUGE OF THE DOUBLE GIRDER TROLLEY, TYPE OF GIRDERS ON THE BRIDGE CRANE AND MAX. GIRDER SPAN					DIMENSION (mm)								WEIGHT					
	DOUBLE GIRDER TROLLEY GAUGE		BRIDGE CRANE GIRDERS		BEAM CODE	(FOR OTHER DIMENSIONS SEE PAGE 15)								(kg)					
	Sc (mm)		TYPE	MAX. SPAN (mm)		I	I1	I2	A	C	D	Ø1	Ø2						
3 - 200 - 3600	1000		Box Girder	360	W336H1..	420	830	85	80	30	195	21	25	310					
				410	W336H2..	480	846	77											
				500	W336H3..	560	846	77											
	1200		HE	300	W336HA..	420	580	210											
				360	W336H4..	420	1030	85											
				410	W336H5..	480	1046	77											
	1400		Box Girder	500	W336H6..	560	1046	77											
				300	W336HD..	420	780	210											
				360	W336H..	420	1230	85											
			HE	410	W336H8..	480	1246	77											
				500	W336H9..	560	1246	77											
				300	W336HG..	420	980	210											
4 - 250 - 2700	1000		Box Girder	410	W427H1..	480	846	77	80	30	235	25	25	312					
				490	W427H2..	560	846	77											
				300	W427HA..	480	520	240											
	1200		Box Girder	410	W427H4..	480	1046	77											
				490	W427H5..	560	1046	77											
				300	W427HD..	480	720	240											
4 - 250 - 3600	1000		Box Girder	490	W436H2..	560	846	77						80	30	235	25	25	383
				565	W436H3..	640	841	79.5											
				300	W436HA..	480	520	240											
	1200		Box Girder	490	W436H5..	560	1046	77											
				565	W436H6..	640	1041	79.5											
				300	W436HD..	480	720	240											
	1400		Box Girder	490	W436H8..	560	1246	77											
				565	W436H9..	640	1241	79.5											
				300	W436HG..	480	920	240											
5 - 315 - 3900	1000		Box Girder	410	W539H1..	500	826	87	100	40	270	29	32	607					
				490	W539H2..	580	826	87											
				615	W539H3..	710	805	97.5											
	1200		HE	300	W539HA..	500	500	250											
				410	W539H4..	500	1026	87											
				490	W539H5..	580	1026	87											
	1400		Box Girder	615	W539H6..	710	1005	97.5											
				300	W539HD..	500	700	250											
				410	W539H7..	500	1226	87											
			HE	490	W539H8..	580	1226	87											
				615	W539H9..	710	1205	97.5											
				300	W539HG..	500	900	250											
6 - 400 - 3900	1000		Box Girder	410	W639H1..	500	826	87	100	40	310	34	32	790					
				490	W639H2..	580	826	87											
				615	W639H3..	710	805	97.5											
	1200		HE	300	W639HA..	500	500	250											
				410	W639H4..	500	1026	87											
				490	W639H5..	580	1026	87											
	1400		Box Girder	615	W639H6..	710	1005	97.5											
				300	W639HD..	500	700	250											
				410	W639H7..	500	1226	87											
			HE	490	W639H8..	580	1226	87											
				615	W639H9..	710	1205	97.5											
				300	W639HG..	500	900	250											
6 - 400 - 3900 R	1400		Box Girder	410	W640H7..	500	1226	87	100	40	310	34	32	975					
				490	W640H8..	580	1226	87											
				615	W640H9..	710	1205	97.5											
				300	W640HG..	500	900	250											

Referred partial codes are applied to couples of end-carriages without counterplates. In case of couples of end-carriages with counterplates, replace letter **H**, in fifth position, with letter **G**. The weights given in the table refer to the individual end-carriage.

END-CARRIAGES FOR DOUBLE GIRDER CRANES WITH CONNECTION PLATES TO "BRIDGE GIRDERS" - "ON THE TOP" EXECUTION

Joining of beam girders in "On the top" execution

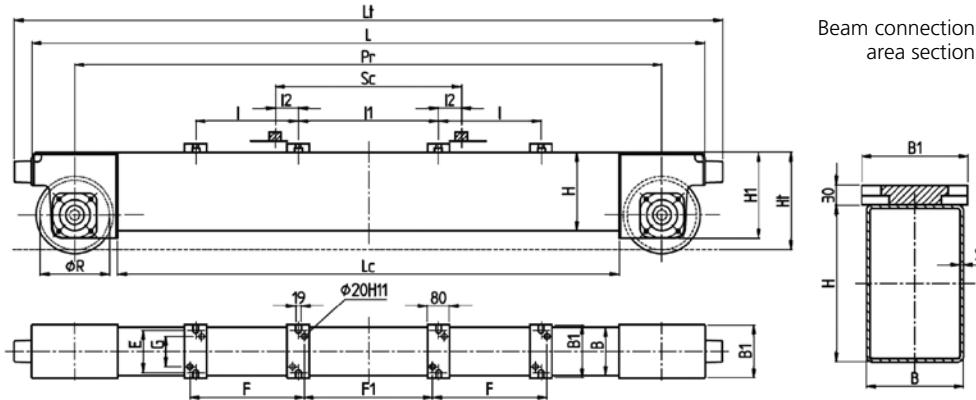

END-CARRIAGES TYPE	BEAM CODES BASED ON THE GAUGE OF THE DOUBLE GIRDER TROLLEY, TYPE OF GIRDERS ON THE BRIDGE CRANE AND MAX. GIRDER SPAN					DIMENSION (mm)								WEIGHT	
	DOUBLE GIRDER TROLLEY GAUGE	BRIDGE CRANE GIRDERS		BEAM CODE	(FOR OTHER DIMENSIONS SEE PAGE 15)										
	Sc (mm)	TYPE	MAX. SPAN (mm)		I	I1	I2	F	F1	A	E	G	(kg)		
1 - 125 - 2400	1000		Box Girder	305	W124V1..	360	870	65	402	828	60	120	78	138	
				370	W124V2..	430	865	67.5	472	823					
			HE	300	W124VA..	360	640	180	402	598					
	1200		Box Girder	305	W124V4..	360	1070	65	402	1028					
				370	W124V5..	430	1065	67.5	472	1023					
			HE	300	W124VD..	360	840	180	402	798					
	1000		Box Girder	305	W133V1..	360	870	65	402	828					
				370	W133V2..	430	865	67.5	472	823					
			HE	300	W133VA..	360	640	180	402	598					
1 - 125 - 3300	1200		Box Girder	305	W133V4..	360	1070	65	402	1028					
				370	W133V5..	430	1065	67.5	472	1023					
			HE	450	W133V6..	510	1005	97.5	552	963					
	1400		Box Girder	300	W133VD..	360	840	180	402	798					
				305	W133V7..	360	1270	65	402	1228					
			Box Girder	370	W133V8..	430	1265	67.5	472	1223					
				450	W133V9..	510	1205	97.5	552	1163					
			HE	300	W133VG..	360	1040	180	402	998					
		2 - 160 - 2400	1000		Box Girder	305	W224V1..	360	870	65	402	828	60	140	98
	370				W224V2..	430	865	67.5	472	823					
	HE			300	W224VA..	360	640	180	402	598					
1200				Box Girder	305	W224V4..	360	1070	65	402	1028				
					370	W224V5..	430	1065	67.5	472	1023				
				HE	300	W224VD..	360	840	180	402	798				
2 - 160 - 3300	1000			Box Girder	370	W233V2..	430	865	67.5	472	823				
					450	W233V3..	510	816	92	552	774				
				HE	300	W233VA..	360	640	180	402	598				
	1200			Box Girder	370	W233V5..	430	1065	67.5	472	1023				
					450	W233V6..	510	1016	92	552	974				
				HE	300	W233VD..	360	840	180	402	798				
1400		Box Girder	370	W233V8..	430	1265	67.5	472	1223						
			450	W233V9..	510	1216	92	552	1174						
		HE	300	W233VG..	360	1040	180	402	998						
3 - 200 - 2700	1000		Box Girder	360	W327V1..	420	830	85	462	788	80	160	118	238	
				410	W327V2..	480	846	77	522	804					
			HE	300	W327VA..	420	580	210	462	538					
	1200		Box Girder	360	W327V4..	420	1030	85	462	988					
				410	W327V5..	480	1046	77	522	1004					
			HE	300	W327VD..	420	780	210	462	738					


END-CARRIAGES FOR DOUBLE GIRDER CRANES WITH CONNECTION PLATES TO “BRIDGE GIRDERS” - “ON THE TOP” EXECUTION

END-CARRIAGES TYPE	BEAM CODES BASED ON THE GAUGE OF THE DOUBLE GIRDER TROLLEY, TYPE OF GIRDERS ON THE BRIDGE CRANE AND MAX. GIRDER SPAN					DIMENSION (mm)								WEIGHT					
	DOUBLE GIRDER TROLLEY GAUGE		BRIDGE CRANE GIRDERS		BEAM CODE	(FOR OTHER DIMENSIONS SEE PAGE 15)													
	Sc (mm)		TYPE	MAX. SPAN (mm)		I	I1	I2	F	F1	A	E	G		(kg)				
3 - 200 - 2700	1400	 	Box Girder HE	360	W327V7..	420	1230	85	462	1188	80	160	118	238					
				410	W327V8..	480	1246	77	522	1204									
				300	W327VG..	420	980	210	462	938									
3 - 200 - 3600	1000	 	Box Girder HE	360	W336V1..	420	830	85	462	788	80	160	118	306					
				410	W336V2..	480	846	77	522	804									
				500	W336V3..	560	846	77	602	804									
	1200	 	Box Girder HE	360	W336V4..	420	1030	85	462	988									
				410	W336V5..	480	1046	77	522	1004									
				500	W336V6..	560	1046	77	602	1004									
				300	W336VD..	420	780	210	462	738									
				1400	 	Box Girder HE	360	W336V7..	420	1230					85	462	1188		
							410	W336V8..	480	1246					77	522	1204		
	500	W336V9..	560				1246	77	602	1204									
	4 - 250 - 2700	1000	 	Box Girder HE	410	W427V1..	480	846	77	522					804	80	190	148	320
					490	W427V2..	560	846	77	602					804				
410					W427VA..	480	520	240	522	478									
1200		 	Box Girder HE	410	W427V4..	480	1046	77	522	1004									
				490	W427V5..	560	1046	77	602	1004									
				300	W427VD..	480	720	240	522	678									
1000		 	Box Girder HE	490	W436V2..	560	846	77	602	804									
				565	W436V3..	640	841	79.5	682	799									
				410	W436VA..	480	520	240	522	478									
				1200	 	Box Girder HE	490	W436V5..	560	1046	77	602	1004						
							565	W436V6..	640	1041	79.5	682	999						
							410	W436VD..	480	720	240	522	678						
1400	 	Box Girder HE	490	W436V8..	560	1246	77	602	1204										
			565	W436V9..	640	1241	79.5	682	1199										
			300	W436VG..	480	920	240	522	878										
5 - 315 - 3900	1000	 	Box Girder HE	410	W539V1..	500	826	87	542	784	100	220	178	600					
				490	W539V2..	580	826	87	622	784									
				615	W539V3..	710	805	97.5	752	763									
				300	W539VA..	500	500	250	542	458									
	1200	 	Box Girder HE	410	W539V4..	500	1026	87	542	984									
				490	W539V5..	580	1026	87	622	984									
				615	W539V6..	710	1005	97.5	752	963									
				300	W539VD..	500	700	250	542	658									
	1400	 	Box Girder HE	410	W539V7..	500	1226	87	542	1184									
				490	W539V8..	580	1226	87	622	1184									
				615	W539V9..	710	1205	97.5	752	1163									
				300	W539VG..	500	900	250	542	858									
6 - 400 - 3900	1000	 	Box Girder HE	410	W639V1..	500	826	87	542	784	100	250	208	787					
				490	W639V2..	580	826	87	622	784									
				615	W639V3..	710	805	97.5	752	763									
				300	W639VA..	500	500	250	542	458									
	1200	 	Box Girder HE	410	W639V4..	500	1026	87	542	984									
				490	W639V5..	580	1026	87	622	984									
				615	W639V6..	710	1005	97.5	752	963									
				300	W639VD..	500	700	250	542	658									
	1400	 	Box Girder HE	410	W639V7..	500	1226	87	542	1184									
				490	W639V8..	580	1226	87	622	1184									
				615	W639V9..	710	1205	97.5	752	1163									
				300	W639VG..	500	900	250	542	858									
6 - 400 - 3900 R	1400	 	Box Girder HE	410	W640V7..	500	1226	87	542	1184				975					
				490	W640V8..	580	1226	87	622	1184									
				615	W640V9..	710	1205	97.5	752	1163									
				300	W640VG..	500	900	250	542	858									

Referred partial codes are applied to couples of end-carriages without counterplates. In case of couples of end-carriages with counterplates, replace letter **V**, in fifth position, with letter **T**. The weights given in the table refer to the individual end-carriage.

END-CARRIAGES FOR DOUBLE GIRDER CRANES WITH CONNECTION PLATES TO "BRIDGE GIRDERS" - "LATERAL + ON THE TOP" EXECUTION

Girder-end-carriage joining in "Lateral+On the top" execution

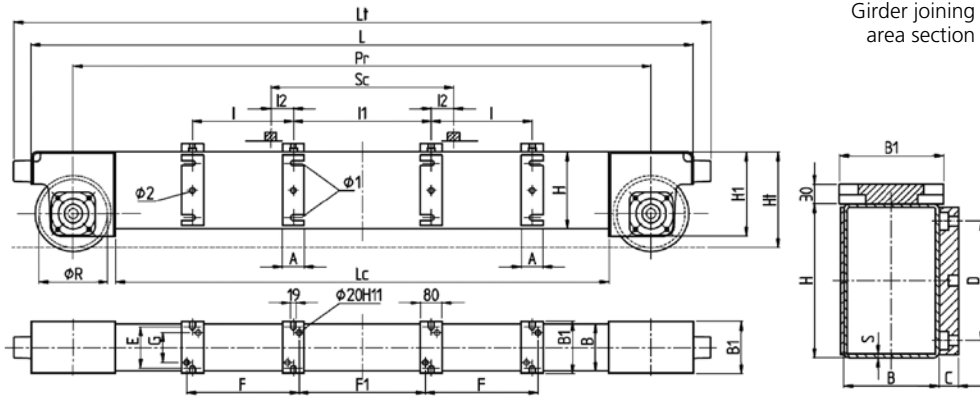

END-CARRIAGES TYPE	BEAM CODES BASED ON THE GAUGE OF THE DOUBLE GIRDER TROLLEY, TYPE OF GIRDERS ON THE BRIDGE CRANE AND MAX. GIRDER SPAN			DIMENSION (mm)														WEIGHT
	DOUBLE GIRDER TROLLEY GAUGE Sc (mm)	BRIDGE CRANE GIRDERS MAX. SPAN BOX GIRDER (mm)	BEAM CODE	(FOR OTHER DIMENSIONS SEE PAGE 15)														(kg)
				I	I1	I2	F	F1	A	C	D	E	G	Ø1	Ø2			
1 - 125 - 2400	1000	305	W124N1..	360	870	65	402	828										
		370	W124N2..	430	865	67.5	472	823										
	1200	305	W124N4..	360	1070	65	402	1028										
		370	W124N5..	430	1065	67.5	472	1023										
	1 - 125 - 3300	1000	305	W133N1..	360	870	65	402	828									
			370	W133N2..	430	865	67.5	472	823									
1200		450	W133N3..	510	805	97.5	552	763	60	25	165	120	78	17	20			
		305	W133N4..	360	1070	65	402	1028										
		370	W133N5..	430	1065	67.5	472	1023										
		450	W133N6..	510	1005	97.5	552	963										
	1400	305	W133N7..	360	1270	65	402	1228										
		370	W133N8..	430	1265	67.5	472	1223										
2 - 160 - 2400	1000	450	W133N9..	510	1205	97.5	552	1163										
		305	W224N1..	360	870	65	402	828										
	1200	370	W224N2..	430	865	67.5	472	823										
		305	W224N4..	360	1070	65	402	1028										
2 - 160 - 3300	1000	370	W224N5..	430	1065	67.5	472	1023										
		370	W233N2..	430	865	67.5	472	823	60	25	190	140	98	19	20			
	1200	450	W233N3..	510	816	92	552	774										
		370	W233N5..	430	1065	67.5	472	1023										
	1400	450	W233N6..	510	1016	92	552	974										
		370	W233N8..	430	1265	67.5	472	1223										
3 - 200 - 2700	1000	450	W233N9..	510	1216	92	552	1174										
		360	W327N1..	420	830	85	462	788										
	1200	410	W327N2..	480	846	77	522	804										
		360	W327N4..	420	1030	85	462	988										
	1400	410	W327N5..	480	1046	77	522	1004										
		360	W327N7..	420	1230	85	462	1188										
3 - 200 - 3600	1000	410	W327N8..	480	1246	77	522	1204										
		360	W336N1..	420	830	85	462	788										
	1200	410	W336N2..	480	846	77	522	804	80	30	195	160	118	21	25			
		500	W336N3..	560	846	77	602	804										
	1400	360	W336N4..	420	1030	85	462	988										
		410	W336N5..	480	1046	77	522	1004										
3 - 200 - 3600	1200	500	W336N6..	560	1046	77	602	1004										
		360	W336N7..	420	1230	85	462	1188										
	1400	410	W336N8..	480	1246	77	522	1204										
		500	W336N9..	560	1246	77	602	1204										


END-CARRIAGES FOR DOUBLE GIRDER CRANES WITH CONNECTION PLATES TO “BRIDGE GIRDERS” “LATERAL + ON THE TOP” EXECUTION

END-CARRIAGES TYPE	BEAM CODES BASED ON THE GAUGE OF THE DOUBLE GIRDER TROLLEY, TYPE OF GIRDERS ON THE BRIDGE CRANE AND MAX. GIRDER SPAN			DIMENSION (mm)														WEIGHT
	DOUBLE GIRDER TROLLEY GAUGE Sc (mm)	BRIDGE CRANE GIRDERS MAX. SPAN BOX GIRDER (mm)	BEAM CODE	(FOR OTHER DIMENSIONS SEE PAGE 15)														
				I	I1	I2	F	F1	A	C	D	E	G	Ø1	Ø2	(kg)		
4 - 250 - 2700	1000	410	W427N1..	480	846	77	522	804										
		490	W427N2..	560	846	77	602	804										
	1200	410	W427N4..	480	1046	77	522	1004										
		490	W427N5..	560	1046	77	602	1004										
4 - 250 - 3600	1000	490	W436N2..	560	846	77	602	804	80	30	235	190	148	25	25			
		565	W436N3..	640	841	79.5	682	799										
	1200	490	W436N5..	560	1046	77	602	1004										
		565	W436N6..	640	1041	79.5	682	999										
	1400	490	W436N8..	560	1246	77	602	1204										
		565	W436N9..	640	1241	79.5	682	1199										
5 - 315 - 3900	1000	410	W539N1..	500	826	87	542	784										
		490	W539N2..	580	826	87	622	784										
		615	W539N3..	710	805	97.5	752	763										
	1200	410	W539N4..	500	1026	87	542	984										
		490	W539N5..	580	1026	87	622	984	100	40	270	220	178	29	32			
		615	W539N6..	710	1005	97.5	752	963										
	1400	410	W539N7..	500	1226	87	542	1184										
		490	W539N8..	580	1226	87	622	1184										
		615	W539N9..	710	1205	97.5	752	1163										
6 - 400 - 3900	1000	410	W639N1..	500	826	87	542	784										
		490	W639N2..	580	826	87	622	784										
		615	W639N3..	710	805	97.5	752	763										
	1200	410	W639N4..	500	1026	87	542	984										
		490	W639N5..	580	1026	87	622	984										
		615	W639N6..	710	1005	97.5	752	963	100	40	310	250	208	34	32			
	1400	410	W639N7..	500	1226	87	542	1184										
		490	W639N8..	580	1226	87	622	1184										
6 - 400 - 3900 R	1400	615	W639N9..	710	1205	97.5	752	1163										
		410	W640N7..	500	1226	87	542	1184										
		490	W640N8..	580	1226	87	622	1184										
		615	W640N9..	710	1205	97.5	752	1163										


Referred partial codes are applied to couples of end-carriages without counterplates. In case of couples of end-carriages with counterplates, replace letter **N**, in fifth position, with letter **M**. The weights given in the table refer to the individual end-carriage.

GEOMETRIC SPECIFICATIONS FOR "GIRDER - BEAM" CONNECTION PLATES FOR SINGLE AND DOUBLE GIRDER BRIDGE CRANES

Connection plate for girder
positioned laterally to the beam



Connection plate for girder
on the top of the beam



END-CARRIAGE TYPE		MAX. BEAM WIDTH	PLATE POSITIONED Laterally TO THE BEAM									PLATE SUPPORTED ON THE TOP OF THE BEAM							
SIZE "DGT"	Ø WHEEL (mm)		TYPE	DIMENSIONS (mm)							WEIGHT (kg)	TYPE	DIMENSIONS (mm)						WEIGHT (kg)
		L (mm)		A	I	B	Ø1	E	Ø2	Sp			F	A	I	B	E	E1	
1	125	305	L11	420	360						8.4	A11	402	440	360				8.0
		370	L12	490	430	220	18	165	20	12	9.9	A12	472	510	430	160	120	78	9.3
		450	L13	570	510						11.6	A13	552	590	510				10.8
2	160	305	L21	420	360						9.6	A21	402	440	360				9.0
		370	L22	490	430	250	20	190	20	12	11.2	A22	472	510	430	180	140	98	10.5
		450	L23	570	510						13.1	A23	552	590	510				12.2
3	200	360	L31	500	420						14.7	A31	462	500	420				11.5
		410	L32	560	480	260	22	195	25	15	16.5	A32	522	560	480	200	160	118	13.0
		500	L33	640	560						19.0	A33	602	640	560				14.7
4	250	410	L41	560	480						19.1	A41	522	560	480				14.8
		490	L42	640	560	300	26	235	25	15	21.9	A42	602	640	560	230	190	148	17.0
		565	L43	720	640						24.7	A43	682	720	640				19.2
5	315	410	L51	600	500						31.6	A51	542	580	500				17.4
		490	L52	680	580	350	30	270	32	20	36.0	A52	622	660	580	260	220	178	20.0
		615	L53	810	710						43.2	A53	752	790	710				23.8
6	400	410	L61	600	500						36.0	A61	542	580	500				19.5
	-	490	L62	680	580	400	36	310	32	20	41.1	A62	622	660	580	290	250	208	22.2
	400R	615	L63	810	710						49.2	A63	752	790	710				26.6

SAMPLE GUIDELINES FOR SELECTING END-CARRIAGES FOR BRIDGE CRANES

To make the correct choice of overhead travelling units, firstly establish all operating parameters which determine operating limitations, defining and/or verifying the following factors (see sample guidelines for various "limit" cases listed below, purely by way of example):

1. Define the crane's operating data: load capacity (kg), ISO service group (FEM), span (m) and travelling speed (m/min);
2. Define: the mass (weight = kg) of the crane in question and any accessories (frame, electrical system, etc.);
3. Define: the weight (kg) of the lifting and travel unit, i.e. of the hoist + trolley (or trolley/winch);
4. Calculate: the total mass to be travelled, i.e. the nominal load + the weight of the crane + the weight of trolley/hoist (or trolley/winch);
5. Select: the type of beams from the "Operating limitations" diagrams on pages 16 and 18, based on the: capacity, ISO service group (FEM) and gauge;
6. Verify: that the mass to be travelled is $\leq$ of the travelling mass, as indicated in the "Operating limitations" on pages 16 and 18;
7. Verify: the maximum, minimum and average reactions on the wheels, considering load juxtapositions/eccentricities;
8. Verify: the congruency of the operating width in contact, in relation to the type of rail on which the wheels slide;
9. Select: the electro-mechanical driving components (choice of offset geared-motor group) from the tables on pages 27 to 35.
10. Determine: the beam code, based on the type selected and construction configuration for the connection with the bridge girder/s, using: for a SINGLE GIRDER crane, the tables on pages 16 - 17, and for a DOUBLE GIRDER crane, the tables on pages 18 to 24;
11. Determine: the type of "girder-beam" joining cross plates using the "Geometric specifications" table on page 25.

1st Example: Double girder travelling bridge crane - Capacity 16 t - Span 27 m

1. nominal load $P = 16.000$ kg; ISO service group M5 (FEM 2m); gauge 27 m; 2 crane running speeds = 40/10 m/min
2. weight of crane + accessories: $M1 \approx 14.600$ kg
3. weight of hoist + trolley: $M2 \approx 1.400$ kg
4. total travelling mass: $16.000 + 14.600 + 1.400 = 32.000$ kg
5. from the diagram on page 18, with a capacity of 16.000 kg; ISO group M5 (FEM 2m) and gauge 27 m, select the beams:
Type 5 – 315 – 3900 or: DGT size 5 Wheel Ø (mm) 315 Wheel basis (mm) 3900
6. from the diagram on page 18, we can deduce that the beams 5 – 315 – 3900 admit masses of up to 35.900 kg $>$ of the 32.000 kg to haul.
7. at this point, check the suitability of the wheel Ø 315 for the selected beams, in relation to its admissible reactions and the type of rail, calculated as illustrated on page 12 for span "S" = 27.000 mm and supposing a juxtaposition "a" = 1.200 mm:
 - $R_{max} = 14.600/4 + [(1.400 + 16.000)/2] \cdot (1 - 1.200/27.000) \approx 11.963$ kg
 - $R_{min} = 14.600/4 + 1.400/2 \cdot 1.200/27.000 \approx 3.681$ kg
 - $R_{ave} = (2 \cdot R_{max} + R_{min})/3 = (2 \cdot 11.963 + 3.681)/3 \approx 9.202$ kg $<$ 14.679 kg, corresponding to the admissible R max.
8. supposing a flat laminated rail, with $l = 60$ and operating band $b = 58$ (see table on page 11), from the diagram on page 14 we can deduce that, for a Ø 315 wheel with a standard sheave width, considering the factors (speed and operating bandwidth), the average admissible reaction for the service group M5 (2m) is: R ave. admissible ≈ 9.900 kg $>$ of the ~ 9.202 kg the wheel is subject to (example on page 14).
9. based on the selected speed and calculation of mass to be travelled for each drive wheel, derive the following components from the table on page 33:

NOMINAL SPEED (m/min)	THE TRAVELLING MASS (kg) FROM EACH GEARED-MOTOR IN THE SERVICE GROUP ISO M5 (FEM 2M) IS IN kg	"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTOR		SELF-BRAKING MOTOR SPECS		"DGP" GEARED-MOTOR CODE
			GEARED-MOTOR TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	
40/10	18.400 > di 16.000 to be hauled	315	234	100K3C	2/8	1.25 / 0.31	P2M5B43AA0

10. supposing a "Supported" connected girder-beam configuration with a double girder trolley gauge of 1.200 mm and a girder span width > 410 and ≤ 490 , from the table on page 22, we can deduce that the beams type 5 – 315 – 3900 have a code: W539V5..
11. from the "Geometric specifications" table on page 25, we can deduce that, for the beams in question with a "Supported" connected girder-beam configuration and a girder span width > 410 and ≤ 490 , the type of "girder-beam" joining cross plates is: A52

2nd Example: Double girder travelling bridge crane - Capacity 10 t - Span 20 m


1. nominal load $P = 10.000$ kg; ISO service group M4 (FEM 1Am); gauge 20 m; 2 crane running speeds = 40/10 m/min
2. weight of crane + accessories: $M1 = 5.900$ kg
3. weight of hoist + trolley: $M2 = 750$ kg
4. total travelling mass: $10.000 + 5.900 + 750 = 16.650$ kg
5. from the diagram on page 18, with a capacity of 10.000 kg; ISO group M4 (FEM 1Am) and gauge 20 m, select the end-carriages:
Type 3 – 200 – 3600 or: DGT size 3 Wheel Ø (mm) 200 Wheel basis (mm) 3600
6. from the diagram on page 18, we can deduce that the beams 3 – 200 – 3600 admit masses of up to 18.800 kg $>$ the 16.650 kg to haul.
7. at this point, check the suitability of the wheel Ø 200 for the selected beams, in relation to its admissible reactions and the type of rail, calculated as illustrated on page 13 for span "S" = 20.000 mm and supposing a juxtaposition "a" = 1.000 mm:
 - $R_{max} = 5.900/4 + [(750 + 10.000)/2] \cdot (1 - 1.000/20.000) \approx 6.581$ kg
 - $R_{min} = 5.900/4 + 750/2 \cdot 1.000/20.000 \approx 1.494$ kg
 - $R_{ave} = (2 \cdot R_{max} + R_{min})/3 = (2 \cdot 6.581 + 1.494)/3 \approx 4.885$ kg $<$ 7.340 kg, corresponding to the admissible R max.
8. supposing a flat laminated rail, with $l = 50$ and operating band $b = 48$ (see table on page 11), from the diagram on page 13 we can deduce that, for a Ø 200 wheel with a standard sheave width, considering the factors (speed and operating bandwidth), the average admissible reaction for the service group M4 (1Am) is: R ave. admissible ≈ 5.500 kg $>$ of the ~ 4.885 kg the wheel is subject to (example on page 13)
9. based on the selected speed and calculation of mass to be travelled for each drive wheel, derive the following components from the table on page 33:

NOMINAL SPEED (m/min)	THE TRAVELLING MASS (kg) FROM EACH GEARED-MOTOR IN THE SERVICE GROUP ISO M5 (FEM 2M) IS IN kg	"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTOR		SELF-BRAKING MOTOR SPECS		"DGP" GEARED-MOTOR CODE
			GEARED-MOTOR TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	
40/10	9.400 > di 8.325 to be hauled	200	134	80K3C	2/8	0.63 / 0.15	P1M3B43KA0


10. supposing a "Lateral + Supported" connected girder-beam configuration with a double girder trolley gauge of 1200 mm and a girder span width > 360 and ≤ 410 , from the table on page 23, we can deduce that the beams type 3 – 200 – 3600 have a code: W336N5..
11. from the "Geometric specifications" table on page 25, we can deduce that, for the beams in question with a "Lateral + Supported" connected girder-beam configuration and a girder span width > 360 and > 410 , the type of "girder-beam" joining cross plates are: L32 + A32

CLEARANCE REQUIREMENTS FOR WHEEL GROUPS BASED ON COMBINATIONS WITH RELATED OFFSET GEARED-MOTORS

Idler drive units



Driven units

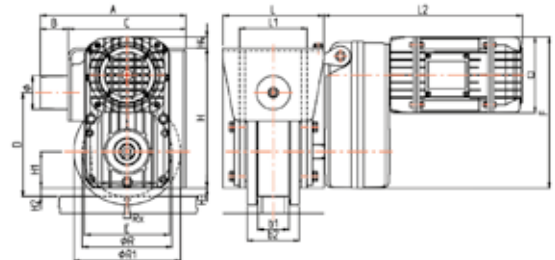

WHEEL SPECIFICATIONS			WHEEL GROUP CLEARANCE (mm)													SIZE		GEARED-MOTOR CLEARANCE (mm)					
TYPE Ø Ø R (mm)	MAX. RX (kg)	INTERNAL WIDTH					Ø									GEARED-MOTOR	MOTOR						
			b1	b2	L1	L	R1	A	B	C	D	Ø	H	H1	H2			L2	□	E	F	H3	H4
125	3.670 36 kN	standard	50	80	100											0	71	332	135	138	223	0	3
		maximum	60			160	150	200	30	170	145	50	220	55	7.5	1	71	368	135	152	270	10.5	39.5
		special	70	90	110											1	80	383	150	152	278	10.5	47.5
160	4.893 48 kN	standard	55	93	120											0	71	332	135	138	223	-10	-17
		maximum	65			180	190	260	50	210	185	60	250	65	15	1	71	368	135	152	270	0.5	19.5
		special	80	105	130											1	80	383	150	152	278	0.5	27.5
200	7.340 72 kN	standard	60													1	71	356	135	152	270	-9.5	-10.5
		maximum	70	100	135											1	80	372	150	152	278	-9.5	-2.5
		special	90	120	145	200	230	325	65	260	230	80	290	75	25	2	80	398	150	227	357	26	41
																2	100	436	190	227	376	26	60
		standard	70	110	149											1	71	356	135	152	270	-24.5	-40.5
		maximum	80			230	280	375	65	310	275	80	335	90	35	1	80	372	150	152	278	-24.5	-32.5
		special	100	135	165											2	80	398	150	227	357	11	11
																2	100	436	190	227	376	11	30
		standard	75	120	159	260	350	470	80	390	335	100	385	105	52.5	2	80	368	150	227	357	-4	-24
315	14.679 144 kN	maximum	85													2	100	406	190	227	376	-4	-5
		special	110	150	180											3	112	500	225	265	456	15	56
																2	80	362	150	227	357	-44	-39
400	18.960 186 kN	standard	85	135	170											2	100	400	190	227	376	-44	-20
		maximum	95			290	440	570	100	470	385	125	440	145	55	2	100	400	190	227	376	-44	-20
		special	115	152	190											3	112	500	225	265	456	-25	41

Quotes L2 in red refer to wheels operating with a "standard" and "maximum" sheave:

For Ø 315 and Ø 400 wheels with a "special" sheave, the dimension L2 increases by 10 mm, with respect to the values listed in the table

TYPES AND REDUCTION RATIOS FOR "DGP" OFFSET GEARED-MOTORS

"DGP" OFFSET GEARED-MOTORS		3 REDUCTION STAGES (TORQUES)				2 REDUCTION STAGES (TORQUES)			
Size 0	Type	031	032	033	034	021	022	023	024
	Reduction ratio	87.85	70.35	57.61	45.20	34.49	28.10	23.46	18.94
Size 1	Type	131	132	133	134	121	122	123	124
	Reduction ratio	89.45	69.98	56.35	44.35	35.10	28.87	22.77	18.50
Size 2	Type	231	232	233	234	221	222	223	224
	Reduction ratio	140.65	109.45	88.10	72.57	55.42	43.24	35.66	29.50
Size 3	Type	331	332	333	334	=			
	Reduction ratio	88.67	70.36	56.65	44.33				

Determining the geared-motors type: E.g. geared-motors 132, where:

1 = geared-motors size 1; 3 = No. of reduction stages (torques); 2 = reduction ratio 69.98.

SPECIFICATIONS AND CODES FOR SELF-BRAKING MOTORS WHICH CAN BE COMBINED WITH “DGP” OFFSET GEARED-MOTORS

MOTOR SIZE	TYPE	POLES (n°)	RPM (g/min)	POWER (kW)	TORQUE (Nm)	I _a (A)	I _n (A)	COS φ	MOTOR CODE
71 M 21 series	71K8C	8	645	0.08	1.09	1.20	0.90	0.45	M21AP80050
	71K4CB	4	1370	0.20	1.36	2.70	1.00	0.55	M21AP40051
	71K2CB	2	2700	0.40	1.36	4.50	1.30	0.70	M21AP20051
	71K2L	2	2740	0.50	1.70	5.20	1.30	0.72	M21AP2I050
	71K3L	2/8	2760/630	0.40/0.09	1.36	4.40/1.20	1.20/0.90	0.75/0.60	M21AP30051
80 M 31 series	80K8L	8	630	0.16	2.18	2.20	1.30	0.48	M31AP80051
	80K4CB	4	1370	0.32	2.18	3.90	1.10	0.65	M31AP40051
	80K2CB	2	2750	0.63	2.18	7.70	1.70	0.75	M31AP20051
	80K2L	2	2770	0.80	2.73	9.70	1.90	0.80	M31AP2I050
	80K3C	2/8	2740/650	0.50/0.12	1.70	5.20/1.60	1.30/1.10	0.85/0.60	M31AP30050
	80K3L	2/8	2760/650	0.63/0.15	2.18	6.70/1.90	1.60/1.30	0.82/0.57	M31AP30051
100 M 51 series	100K8L	8	670	0.40	5.46	5.40	2.50	0.45	M51AP80051
	100K4CB	4	1390	0.80	5.46	8.90	2.00	0.80	M51AP40051
	100K2CB	2	2800	1.60	5.46	21.00	3.70	0.80	M51AP20051
	100K2L	2	2780	2.00	6.82	23.00	4.30	0.86	M51AP2I050
	100K3C	2/8	2820/680	1.25/0.31	4.36	15.70/3.60	3.10/1.80	0.84/0.60	M51AP30050
	100K3L	2/8	2790/660	1.60/0.39	5.46	21.00/4.00	3.50/2.30	0.86/0.60	M51AP30051
112 M 61 series	112K8L	8	690	0.63	8.72	8.60	3.40	0.50	M61AP80050
	112K4C	4	1430	1.25	8.72	20.50	3.60	0.65	M61AP40050
	112K2L	2	2800	3.20	10.92	39.00	6.50	0.88	M61AP2I050
	112K3L	2/8	2850/690	2.50/0.62	8.72	33.00/7.30	5.60/3.40	0.85/0.50	M61AP30050

Specifications for self-braking motors are related to the M4 service group (1Am) – RI 4 0% – Power voltage 400 V

CODES FOR “DGT” DRIVE WHEEL GROUPS READY FOR MATCHING WITH “DGP” OFFSET GEARED-MOTORS

“DGP” OFFSET GEARED-MOTORS	“DGT” DRIVE WHEEL GROUP Ø (mm)						
	125	160	200	250	315	400	400 R
Size 0	DGT1A0M10	DGT2A0M10	=	=	=	=	=
Size 1	DGT1A0M30	DGT2A0M30	DGT3A0M10	DGT4A0M12	=	=	=
Size 2	=	=	DGT3A0M30	DGT4A0M32	DGT5A0M12 (rh) DGT5A0M22 (lh)	DGT6A0M12 (rh) DGT6A0M22 (lh)	DGT6A0M62 (rh) DGT6A0M72 (lh)
Size 3	=	=	=	=	DGT5A0M32 (rh) DGT5A0M42 (lh)	DGT6A0M32 (rh) DGT6A0M42 (lh)	DGT6A0M82 (rh) DGT6A0M92 (lh)

The configuration (r) = right and (l) = left, for wheel groups Ø 315 and Ø 400 refers to the positioning of the welded reaction arm. The codes refer to drive wheels with a standard sheave width. In the case of wheels with different sheave widths, replace the letter **M** in the code with the letter **P** for wheels with a maximum sheave width, or **S** for wheels with a special sheave width

MAX. WEIGHTS FOR “DGT” DRIVEN WHEEL UNITS COUPLED WITH “DGP” OFFSET GEARED-MOTORS

“DGT” DRIVE WHEEL GROUP	“DGP” OFFSET GEARED-MOTORS					
	“DGP” GEARED-MOTORS SIZE 0	“DGP” GEARED-MOTORS SIZE 1		“DGP” GEARED-MOTORS SIZE 2		“DGP” GEARED-MOTORS SIZE 3
	“DGP” MOTORS SIZE 71	“DGP” MOTORS SIZE 71	“DGP” MOTORS SIZE 80	“DGP” MOTORS SIZE 80	“DGP” MOTORS SIZE 100	“DGP” MOTORS SIZE 112
125	max. 32 kg	max. 36 kg	max. 38 kg	=	=	=
160	max. 40 kg	max. 44 kg	max. 48 kg	=	=	=
200	=	max. 54 kg	max. 58 kg	max. 75 kg	max. 83 kg	=
250	=	max. 73 kg	max. 75 kg	max. 94 kg	max. 102 kg	=
315	=	=	=	max. 125 kg	max. 133 kg	max. 172 kg
400	=	=	=	max. 197 kg	max. 205 kg	max. 236 kg
400 R	=	=	=	max. 197 kg	max. 205 kg	max. 236 kg

CODES AND WEIGHTS FOR “DGT” IDLER WHEEL UNITS

“DGT” IDLE WHEEL GROUP Ø (mm)	CODE	WEIGHT (kg)
125	DGT1A0M00	15.5
160	DGT2A0M00	23.5
200	DGT3A0M00	37.5
250	DGT4A0M00	57.0
315	DGT5A0M00	88.0
400	DGT6A0M00	152.0
400 R	DGT6A0M50	152.0

The codes refer to idle wheels with a standard sheave width. In the case of wheels with different sheave widths, replace the letter **M** in the code with the letter **P** for wheels with a maximum sheave width, or **S** for wheels with a special sheave width

TRAVELLING MASSES AT 1 SPEED, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED (m/min)	TRAVELLING MASS (kg) ISO SERVICE GROUP (FEM)		"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
	M4 (1Am)	M5 (2m)		REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
3.2	7.400	7.400	125	031	71K8C	8	0.08	DGT1A0M10	P0M2B18AA0
	14.700	14.700	200	231	80K8C	8	0.12	DGT3A0M30	P2M3B18AA0
4	7.400	7.400	125	032	71K8C	8	0.08	DGT1A0M10	P0M2B28AA0
	9.800	8.000	160	031	71K8C	8	0.08	DGT2A0M10	P0M2B18AA0
	14.700	14.700	200	232	80K8L	8	0.16	DGT3A0M30	P2M3B28KA0
	21.600	21.600	250	231	80K8L	8	0.16	DGT4A0M32	P2M3B18KA0
	6.700	5.360	125	033	71K8C	8	0.08	DGT1A0M10	P0M2B38AA0
	7.400	7.400	125	133	80K8L	8	0.16	DGT1A0M30	P1M3B38KA0
5	8.000	6.400	160	032	71K8C	8	0.08	DGT2A0M10	P0M2B28AA0
	9.800	9.800	160	132	80K8L	8	0.16	DGT2A0M30	P1M3B28KA0
	9.600	7.600	200	131	71K8C	8	0.08	DGT3A0M10	P1M2B18AA0
	14.700	14.700	200		80K8L	8	0.16		P1M3B18KA0
	21.600	18.000	250	232	80K8L	8	0.16	DGT4A0M32	P2M3B28KA0
	21.600	21.600	250		100K8L	8	0.40		P2M5B28KA0
	23.300	18.600	315	231	80K8L	8	0.16	DGT5A0M12 (rh)	P2M3B18KA0
	29.400	29.400	315		100K8L	8	0.40	DGT5A0M22 (lh)	P2M5B18KA0
	7.400	7.400	125	031	71K4CB	4	0.20	DGT1A0M10	P0M2B14KA0
	6.400	5.100	160	033	71K8C	8	0.08	DGT2A0M10	P0M2B38AA0
6.3	9.800	8.000	160	133	80K8L	8	0.16	DGT2A0M30	P1M3B38KA0
	14.700	14.700	200	231	80K4CB	4	0.32	DGT3A0M30	P2M3B14KA0
	9.000	7.200	250	131	71K8C	8	0.08	DGT4A0M12	P1M2B18AA0
	18.000	14.400	250		80K8L	8	0.16		P1M3B18KA0
	21.600	21.600	315	233	100K8L	8	0.40	DGT4A0M32	P2M5B38KA0
	18.600	14.900	315	232	80K8L	8	0.16	DGT5A0M12 (rh)	P2M3B28KA0
	29.400	29.400	315		100K8L	8	0.40	DGT5A0M22 (lh)	P2M5B28KA0
	20.800	16.600	400	231	80K8L	8	0.16	DGT6A0M12 (rh)	P2M3B18KA0
	41.400	33.100	400		100K8L	8	0.40	DGT6A0M22 (lh)	P2M5B18KA0
	41.400	33.100	400 R	231	100K8L	8	0.40	DGT6A0M62 (rh)	P2M5B18KA0
	51.700	41.400	400 R		100K8L	8	0.40	DGT6A0M72 (lh)	
	7.400	6.658	125	032	71K4CB	4	0.20	DGT1A0M10	P0M2B24KA0
8	9.800	8.000	160	031	71K4CB	4	0.20	DGT2A0M10	P0M2B14KA0
	9.800	9.800	160	131		4	0.20	DGT2A0M30	P1M2B14KA0
	6.000	4.800	200	133	71K8C	8	0.08	DGT3A0M10	P1M2B38AA0
	12.000	9.600	200		80K8L	8	0.16		P1M3B38KA0
	14.700	14.700	250	232	80K4CB	4	0.32	DGT3A0M30	P2M3B24KA0
	13.800	11.000	250	132	80K8L	8	0.16	DGT4A0M12	P1M3B28KA0
	21.600	21.600	315	231	80K4CB	4	0.32	DGT4A0M32	P2M3B14KA0
	14.600	11.700	315	233	80K8L	8	0.16	DGT5A0M12 (rh)	P2M3B38KA0
	29.400	29.400	315		100K8L	8	0.40	DGT5A0M22 (lh)	P2M5B38KA0
	16.300	13.000	400	232	80K8L	8	0.16	DGT6A0M12 (rh)	P2M3B28KA0
	41.400	33.100	400		100K8L	8	0.40	DGT6A0M22 (lh)	P2M5B28KA0
	41.400	33.100	400 R	232	100K8L	8	0.40	DGT6A0M62 (rh)	P2M5B28KA0
			400 R		100K8L	8	0.40	DGT6A0M72 (lh)	

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in red require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

TRAVELLING MASSES AT 1 SPEED, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED	TRAVELLING MASS (kg)		"DGT" WHEEL GROUP	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
	ISO SERVICE GROUP (FEM)			REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
(m/min)	M4 (1Am)	M5 (2m)	Ø (mm)						
10	7.400	6.720	125	033	71K4CB	4	0.20	DGT1A0M10	P0M2B34KA0
	9.800	8.000	160	032	71K4CB	4	0.20	DGT2A0M10	P0M2B24KA0
	9.800	9.800		132	80K4CB	4	0.32	DGT2A0M30	P1M3B24KA0
	12.000	9.600	200	131	71K4CB	4	0.20	DGT3A0M10	P1M2B14KA0
	14.700	14.700			80K4CB	4	0.32		P1M3B14KA0
	11.200	8.900	250	133	80K8L	8	0.16	DGT4A0M12	P1M3B38KA0
	21.600	18.000		232	80K4CB	4	0.32	DGT4A0M32	P2M3B24KA0
	21.600	21.600			100K4CB	4	0.80		P2M5B24KA0
	23.300	18.600	315	231	80K4CB	4	0.32	DGT5A0M12 (rh)	P2M3B14KA0
	29.400	29.400			100K4CB	4	0.80	DGT5A0M22 (lh)	P2M5B14KA0
	33.100	26.500	400	233	100K8L	8	0.40	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M5B38KA0
	42.800	41.300		331	112K8L	8	0.63	DGT6A0M32 (rh) DGT6A0M42 (lh)	P3M6B18AA0
	33.100	=	400 R	233	100K8L	8	0.40	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B38KA0
	51.600	41.300		331	112K8L	8	0.63	DGT6A0M82 (rh) DGT6A0M92 (lh)	P3M6B18AA0
12,5	7.400	7.400	125	031	71K2CB	2	0.40	DGT1A0M10	P0M2B12KA0
	8.000	6.400	160	033	71K4CB	4	0.20	DGT2A0M10	P0M2B34KA0
	9.800	9.800		133	80K4CB	4	0.32	DGT2A0M30	P1M3B34KA0
	9.600	7.600	200	132	71K4CB	4	0.20	DGT3A0M10	P1M2B24KA0
	14.700	12.200			80K4CB	4	0.32		P1M3B24KA0
	14.700	14.700		231	80K2CB	2	0.63	DGT3A0M30	P2M3B12KA0
	11.200	9.000	250	131	71K4CB	4	0.20	DGT4A0M12	P1M2B14KA0
	18.000	14.400			80K4CB	4	0.32		P1M3B14KA0
	21.600	21.600		233	100K4CB	4	0.80	DGT4A0M32	P2M5B34KA0
	18.600	14.900	315	232	80K4CB	4	0.32	DGT5A0M12 (rh)	P2M3B24KA0
	29.400	29.400			100K4CB	4	0.80	DGT5A0M22 (lh)	P2M5B24KA0
	20.800	16.600	400	231	80K4CB	4	0.32	DGT6A0M12 (rh)	P2M3B14KA0
	41.400	33.100			100K4CB	4	0.80	DGT6A0M22 (lh)	P2M5B14KA0
	52.600	42.100	400 R	231	100K4CB	4	0.80	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B14KA0
10	7.400	6.656	125	032	71K2CB	2	0.40	DGT1A0M10	P0M2B22KA0
	9.800	8.000	160	031	71K2CB	2	0.40	DGT2A0M10	P0M2B12KA0
	9.800	9.800		131				DGT2A0M30	P1M2B12KA0
	7.500	6.000	200	133	71K4CB	4	0.20	DGT3A0M10	P1M2B34KA0
	12.000	9.600				80K4CB	4		0.32
	14.700	14.700		232	80K2CB	2	0.63	DGT3A0M30	P2M3B22KA0
	13.800	11.000	250	132	80K4CB	4	0.32	DGT4A0M12	P1M3B24KA0
	21.600	21.600		231	80K2CB	2	0.63	DGT4A0M32	P2M3B12KA0
	14.600	11.600		233	80K4CB	4	0.32	DGT5A0M12 (rh)	P2M3B34KA0
	29.400	29.400	315		100K4CB	4	0.80	DGT5A0M22 (lh)	P2M5B34KA0
	16.300	13.000	232	80K4CB	4	0.32	DGT6A0M12 (rh)	P2M3B24KA0	
	41.400	33.100		100K4CB	4	0.80	DGT6A0M22 (lh)	P2M5B24KA0	
	41.400	33.100	400 R	232	100K4CB	4	0.80	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B24KA0

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in red require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

TRAVELLING MASSES AT 1 SPEED, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED	TRAVELLING MASS (kg) ISO SERVICE GROUP (FEM)		"DGT" WHEEL GROUP	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
	M4 (1Am)	M5 (2m)		Ø (mm)	REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP
20	7.400	6.720	125	033	71K2CB	2	0.40	DGT1A0M10	P0M2B32KA0
	9.800	8.000	160	032	71K2CB	2	0.40	DGT2A0M10	P0M2B22KA0
	9.800	9.800		132	71K2L	2 with inv.	0.50	DGT2A0M30	P1M2B21KA0
	12.000	9.600	200	131	71K2CB	2	0.40	DGT3A0M10	P1M2B12KA0
	14.700	12.200			71K2L	2 with inv.	0.50		P1M2B11KA0
	14.700	14.700			80K2CB	2	0.63		P1M3B12KA0
	11.200	8.900	250	133	80K4CB	4	0.32	DGT4A0M12	P1M3B34KA0
	21.600	17.200		232	80K2CB	2	0.63	DGT4A0M32	P2M3B22KA0
	21.600	21.600			80K2L	2 with inv.	0.80		P2M3B21KA0
	23.300	18.600		315	231	80K2CB	2	0.63	DGT5A0M12 (rh) DGT5A0M22 (lh)
	29.400	23.700	80K2L			2 with inv.	0.80	P2M3B11KA0	
	29.400	29.400	100K2CB			2	1.60	P2M5B12KA0	
	33.100	26.500	400	233	100K4CB	4	0.80	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M5B34KA0
	42.800	41.300		331	112K4C	4	1.25	DGT6A0M32 (rh) DGT6A0M42 (lh)	P3M6B14AA0
	33.100	26.500	400 R	233	100K4CB	4	0.80	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B34KA0
	51 700	41 300		331	112K4C	4	1.25	DGT6A0M82 (rh) DGT6A0M92 (lh)	P3M6B14AA0
25	6.700	5.360	125	034	71K2CB	2	0.40	DGT1A0M10	P0M2B42KA0
	7.400	6.700			71K2L	2 with inv.	0.50		P0M2B41KA0
	7.400	6.700		134	80K2CB	2	0.63	DGT1A0M30	P1M3B42KA0
	8.000	6.400	160	033	71K2CB	2	0.40	DGT2A0M10	P0M2B32KA0
	9.800	8.000			71K2L	2 with inv.	0.50		P0M2B31KA0
	9.800	9.800		133	80K2CB	2	0.63	DGT2A0M30	P1M3B32KA0
	9.600	7.600	200	132	71K2CB	2	0.40	DGT3A0M10	P1M2B22KA0
	12.000	9.600			71K2L	2 with inv.	0.50		P1M2B21KA0
	14.700	12.000			80K2CB	2	0.63		P1M3B22KA0
	14.700	14.700			80K2L	2 with inv.	0.80		P1M3B21KA0
	11.200	8.900			71K2CB	2	0.40		P1M2B12KA0
	13.800	11.000	250	131	71K2L	2 with inv.	0.50	DGT4A0M12	P1M2B11KA0
	17.200	13.800			80K2CB	2	0.63		P1M3B12KA0
	21.600	21.600		233	100K2CB	2	1.60	DGT4A0M32	P2M5B32KA0
	18.600	14.900			80K2CB	2	0.63		P2M3B22KA0
	23.700	18.900	315	232	80K2L	2 with inv.	0.80	DGT5A0M12 (rh) DGT5A0M22 (lh)	P2M3B21KA0
	29.400	29.400			100K2CB	2	1.60		P2M5B22KA0
	20.800	16.600			80K2CB	2	0.63		P2M3B12KA0
	26.500	21.200	400	231	80K2L	2 with inv.	0.80	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M3B11KA0
	41.400	33.100			100K2CB	2	1.60		P2M5B12KA0
	53 000	42 400			100K2CB	2	1.60		DGT6A0M62 (rh) DGT6A0M72 (lh)
	66 200	53 000	400 R	231	100K2L	2 with inv.	2.00		P2M5B11KA0

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in red require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

TRAVELLING MASSES AT 2 SPEEDS, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED (m/min)	TRAVELLING MASS (kg) ISO SERVICE GROUP (FEM)		"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
	M4 (1Am)	M5 (2m)		REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
12.5/3.2	7.400	7.400	125	031	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2B13KA0
	7.400	7.400			71K2L	2 with inv.	0.50		P0M2B11KA0
	14.700	14.700	200	231	80K3C	2/8	0.50/0.12	DGT3A0M30	P2M3B13AA0
16/4	7.400	6.656	125	032	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2B23KA0
	7.400	6.656			71K2L	2 with inv.	0.50		P0M2B21KA0
	9.800	8.000	160	031	71K3L	2/8	0.40/0.09	DGT2A0M10	P0M2B13KA0
	9.800	9.800			131				P1M2B13KA0
	14.700	14.700	200	232	80K3C	2/8	0.50/0.12	DGT3A0M30	P2M3B23AA0
	21.600	17.200	250	231	80K3C	2/8	0.50/0.12	DGT4A0M32	P2M3B13AA0
	21.600	21.600			80K3L	2/8	0.63/0.15		P2M3B13KA0
	7.400	6.720	125	033	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2B33KA0
	7.400	6.720			71K2L	2 with inv.	0.50		P0M2B31KA0
20/5	9.800	8.000	160	032	71K3L	2/8	0.40/0.09	DGT2A0M10	P0M2B23KA0
	9.800	9.800			132	2 with inv.	0.50		P1M2B21KA0
	12.000	9.600	200	131	71K3L	2/8	0.40/0.09	DGT3A0M10	P1M2B13KA0
	14.700	12.000			71K2L	2 with inv.	0.50		P1M2B11KA0
	14.700	12.000	250	232	80K3C	2/8	0.50/0.12	DGT4A0M32	P1M3B13AA0
	14.700	14.700			80K3L	2/8	0.63/0.15		P1M3B13KA0
	17.200	13.700	315	231	80K3C	2/8	0.50/0.12	DGT5A0M12 (rh) DGT5A0M22 (lh)	P2M3B23AA0
	21.600	17.200			80K3L	2/8	0.63/0.15		P2M3B23KA0
	21.600	21.600	400	231	80K2L	2 with inv.	0.80	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M3B21KA0
	18.500	14.800			80K3C	2/8	0.50/0.12		P2M3B13AA0
	23.300	18.600	400 R	231	80K3L	2/8	0.63/0.15	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M3B13KA0
	29.400	23.700			80K2L	2 with inv.	0.80		P2M3B11KA0
	29.400	29.400	400 R	231	100K3C	2/8	1.25/0.31	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B13AA0
	6.700	5.360			71K3L	2/8	0.40/0.09		P0M2B43KA0
	7.400	6.700	125	034	71K2L	2 with inv.	0.50	DGT1A0M10	P0M2B41KA0
	7.400	6.700			134	2 with inv.	0.50		P1M3B43AA0
25/6.3	8.000	6.400	160	033	71K3L	2/8	0.40/0.09	DGT2A0M10	P0M2B33KA0
	9.800	8.000			71K2L	2 with inv.	0.50		P0M2B31KA0
	9.800	9.800	200	133	80K3C	2/8	0.50/0.12	DGT2A0M30	P1M3B33AA0
	9.600	7.600			71K3L	2/8	0.40/0.09		P1M2B23KA0
	12.000	9.600	250	132	71K2L	2 with inv.	0.50	DGT3A0M10	P1M2B21KA0
	12.000	9.600			80K3C	2/8	0.50/0.12		P1M3B23AA0
	14.700	12.000	315	131	80K3L	2/8	0.63/0.15	DGT4A0M12	P1M3B23KA0
	14.700	14.700			80K2L	2 with inv.	0.80		P1M3B21KA0
	11.200	9.000	400	233	71K3L	2/8	0.40/0.09	DGT4A0M32	P1M2B13KA0
	13.800	11.000			71K2L	2 with inv.	0.50		P1M2B11KA0
	13.800	11.000	400 R	233	80K3C	2/8	0.50/0.12	DGT5A0M12 (rh) DGT5A0M22 (lh)	P1M3B13AA0
	17.200	13.800			80K3L	2/8	0.63/0.15		P1M3B13KA0
	21.600	21.600	400 R	233	100K3C	2/8	1.25/0.31	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M5B33AA0
	14.800	11.900			80K3C	2/8	0.50/0.12		P2M3B23AA0
	18.600	14.900	400 R	232	80K3L	2/8	0.63/0.15	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M3B23KA0
	23.700	18.900			80K2L	2 with inv.	0.80		P2M3B21KA0
	29.400	29.400	400 R	231	100K3C	2/8	1.25/0.31	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B23AA0
	20.800	16.600			80K3L	2/8	0.63/0.15		P2M3B13KA0
	26.500	21.200	400 R	231	80K2L	2 with inv.	0.80	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M3B11KA0
	41.400	33.100			100K3C	2/8	1.25/0.31		P2M5B13AA0
	41.400	33.100	400 R	231	100K3C	2/8	1.25/0.31	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B13AA0
	53 000	42 400			100K3L	2/8	1.60/0.39		P2M5B13KA0
	66 200	53 000	400 R	231	100K2L	2 with inv.	2.00		P2M5B11KA0

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in red require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

TRAVELLING MASSES AT 2 SPEEDS, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED	TRAVELLING MASS (kg)		"DGT" WHEEL GROUP	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS		
	ISO SERVICE GROUP (FEM)			REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR	
(m/min)	M4 (1Am)	M5 (2m)	Ø (mm)							
32/8	5.200	4.160	125	021	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2A13KA0	
	6.500	5.200		121	71K2L	2 with inv.	0.50	DGT1A0M30	P1M2A11KA0	
	6.500	5.200			80K3C	2/8	0.50/0.12		P1M3A13AA0	
	7.400	6.656			80K3L	2/8	0.63/0.15		P1M3A13KA0	
	7.400	6.656			80K2L	2 with inv.	0.80		P1M3A11KA0	
	6.300	5.000		034	71K3L	2/8	0.40/0.09	DGT2A0M10	P0M2B43KA0	
	7.900	6.300			71K2L	2 with inv.	0.50		P0M2B41KA0	
	7.900	6.300			80K3C	2/8	0.50/0.12		P1M3B43AA0	
	9.800	8.000	160	134	80K3L	2/8	0.63/0.15	DGT2A0M30	P1M3B43KA0	
	9.800	8.800			80K2L	2 with inv.	0.80		P1M3B41KA0	
	7.600	6.000			71K3L	2/8	0.40/0.09	DGT3A0M10	P1M2B33KA0	
	9.600	7.600			71K2L	2 with inv.	0.50		P1M2B31KA0	
	9.600	7.600		133	80K3C	2/8	0.50/0.12		P1M3B33AA0	
	12.000	9.600			80K3L	2/8	0.63/0.15		P1M3B33KA0	
	14.700	12.000			80K2L	2 with inv.	0.80		P1M3B31KA0	
	14.700	14.700	200	221	100K3C	2/8	1.25/0.31	DGT3A0M30	P2M5A13AA0	
	10.800	8.600			71K2L	2 with inv.	0.50		P1M2B21KA0	
	10.800	8.600			80K3C	2/8	0.50/0.12	DGT4A0M12	P1M3B23AA0	
	13.500	10.800			80K3L	2/8	0.63/0.15		P1M3B23KA0	
	17.200	13.700	250	132	80K2L	2 with inv.	0.80		P1M3B21KA0	
	21.600	21.600			100K3C	2/8	1.25/0.31	DGT4A0M32	P2M5B43AA0	
	14.600	11.600			80K3L	2/8	0.63/0.15		P2M3B33KA0	
	18.500	14.800			315	233	80K2L	2 with inv.	0.80	DGT5A0M12 (rh) DGT5A0M22 (lh)
	28.900	23.100	100K3C	2/8			1.25/0.31	P2M5B33AA0		
	29.400	29.400	100K3L	2/8			1.60/0.39	P2M5B33KA0		
	20.700	16.500	232	80K2L		2 with inv.	0.80	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M3B21KA0	
	32.300	25.800		100K3C		2/8	1.25/0.31		P2M5B23AA0	
	41.400	33.100		100K3L	2/8	1.60/0.39	P2M5B23KA0			
	32.300	=		400		100K3C	2/8		1.25/0.31	DGT6A0M62 (rh) DGT6A0M72 (lh)
	41.400	33.100	100K3L			2/8	1.60/0.39	P2M5B23KA0		
	51.700	41.300	400 R	232	100K2L	2 with inv.	2.00	P2M5B21KA0		
	4.200	3.360			125	022	71K3L	2/8	0.40/0.09	DGT1A0M10
5.250	4.200	71K2L					2 with inv.	0.50	P0M2A21KA0	
5.250	4.200	122	80K3C	2/8		0.50/0.12	DGT1A0M30	P1M3A23AA0		
6.695	5.356		80K3L	2/8		0.63/0.15		P1M3A23KA0		
7.400	6.720		80K2L	2 with inv.		0.80		P1M3A21KA0		
5.000	4.000	160	021	71K3L	2/8	0.40/0.09	DGT2A0M10	P0M2A13KA0		
6.300	5.000			71K2L	2 with inv.	0.50		P1M2A11KA0		
6.300	5.000		121	80K3C	2/8	0.50/0.12	DGT2A0M30	P1M3A13AA0		
7.900	6.300			80K3L	2/8	0.63/0.15		P1M3A13KA0		
10.000	8.000	80K2L		2 with inv.	0.80	P1M3A11KA0				
7.600	6.000	71K2L		2 with inv.	0.50	DGT3A0M10	P1M2B41KA0			
7.600	6.000	200	134	80K3C	2/8		0.50/0.12	P1M3B43AA0		
9.400	7.600			80K3L	2/8		0.63/0.15	P1M3B43KA0		
12.000	9.600			80K2L	2 with inv.		0.80	P1M3B41KA0		
14.700	14.700		222	100K3C	2/8	1.25/0.31	DGT3A0M30	P2M5A23AA0		
10.800	8.600	250		80K3L	2/8	0.63/0.15		P1M3B33KA0		
13.500	10.800	133	80K2L	2 with inv.	0.80	DGT4A0M12	P1M3B31KA0			
21.600	17.200		100K3C	2/8	1.25/0.31		P2M5A13AA0			
21.600	21.600	221	100K3L	2/8	1.60/0.39	DGT4A0M32	P2M5A13KA0			
11.600	9.300		80K3L	2/8	0.63/0.15		P2M3B43KA0			
14.800	11.900		315		80K2L	2 with inv.	0.80	DGT5A0M12 (rh) DGT5A0M22 (lh)	P2M3B41KA0	
23.000	18.400	234	100K3C	2/8	1.25/0.31	P2M5B43AA0				
29.400	23.700		100K3L	2/8	1.60/0.39	P2M5B43KA0				
29.400	29.400		100K2L	2 with inv.	2.00	P2M5B41KA0				
13.000	10.400	400	233	80K3L	2/8	0.63/0.15	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M3B33KA0		
16.500	13.200			80K2L	2 with inv.	0.80		P2M3B31KA0		
25.800	20.600			100K3C	2/8	1.25/0.31		P2M5B33AA0		
33.100	26.400			100K3L	2/8	1.60/0.39		P2M5B33KA0		
41.300	33.100	400 R	331	100K2L	2 with inv.	2.00	DGT6A0M32 (rh) DGT6A0M42 (lh)	P2M5B31KA0		
42.800	41.300			112K3L	2/8	2.50/0.62		P3M6B13KA0		
33.100	26.400		233	100K3L	2/8	1.60/0.39	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B33KA0		
41.300	33.100			100K2L	2 with inv.	2.00		P2M5B31KA0		
51.600	41.300		331	112K3L	2/8	2.50/0.62	DGT6A0M82 (rh) DGT6A0M92 (lh)	P3M6B13KA0		
66.000	52.800			112K2L	2 with inv.	3.20		P3M6B11KA0		

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in red require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

TRAVELLING MASSES AT 2 SPEEDS, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED (m/min)	TRAVELLING MASS (kg) ISO SERVICE GROUP (FEM)		"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
	M4 (1Am)	M5 (2m)		REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
50/12.5	3.300	2.640	125	023	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2A33KA0
	4.125	3.300			71K2L	2 with inv.	0.50		P0M2A31KA0
	4.125	3.300			80K3C	2/8	0.50/0.12		P1M3A33AA0
	5.197	4.157		123	80K3L	2/8	0.63/0.15	DGT1A0M30	P1M3A33KA0
	6.600	5.280			80K2L	2 with inv.	0.80		P1M3A31KA0
	5.000	4.000	160	022	71K2L	2 with inv.	0.50	DGT2A0M10	P0M2A21KA0
	5.000	4.000			80K3C	2/8	0.50/0.12		P1M3A23AA0
	6.300	5.000			80K3L	2/8	0.63/0.15		P1M3A23KA0
	8.000	6.300		122	80K2L	2 with inv.	0.80	DGT2A0M30	P1M3A21KA0
	6.000	4.800			71K2L	2 with inv.	0.50		P1M2A11KA0
	7.600	6.000	200	121	80K3L	2/8	0.63/0.15	DGT3A0M10	P1M3A13KA0
	9.400	7.600			80K2L	2 with inv.	0.80		P1M3A11KA0
	14.700	12.000			100K3C	2/8	1.25/0.31		P2M5A33AA0
	14.700	14.700		223	100K3L	2/8	1.60/0.39	DGT3A0M30	P2M5A33KA0
	8.600	6.900			80K3L	2/8	0.63/0.15		P1M3B43KA0
	10.800	8.600	250	134	80K2L	2 with inv.	0.80	DGT4A0M12	P1M3B41KA0
	17.200	13.800			100K3C	2/8	1.25/0.31		P2M5A23AA0
	21.600	17.200			100K3L	2/8	1.60/0.39		P2M5A23KA0
	21.600	21.600		222	100K2L	2 with inv.	2.00	DGT4A0M32	P2M5A21KA0
	9.200	7.400			80K3L	2/8	0.63/0.15		P2M3A13KA0
	11.800	9.400	315	221	80K2L	2 with inv.	0.80	DGT5A0M12 (rh) DGT5A0M22 (lh)	P2M3A11KA0
	18.400	14.700			100K3C	2/8	1.25/0.31		P2M5A13AA0
	23.600	18.900			100K3L	2/8	1.60/0.39		P2M5A13KA0
	29.400	29.400		333	112K3L	2/8	2.50/0.62	DGT5A0M32 (rh) DGT5A0M42 (lh)	P3M6B33KA0
	20.700	16.600			100K3C	2/8	1.25/0.31		P2M5B43AA0
	26.500	21.200	400	234	100K3L	2/8	1.60/0.39	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M5B43KA0
	33.000	26.400			100K2L	2 with inv.	2.00		P2M5B41KA0
	41.200	33.000			112K3L	2/8	2.50/0.62		P3M6B23KA0
	42.800	42.200		332	112K2L	2 with inv.	3.20	DGT6A0M32 (rh) DGT6A0M42 (lh)	P3M6B21KA0
	33.000	26.400			100K2L	2 with inv.	2.00		P2M5B41KA0
	41.200	33.000	400 R	332	112K3L	2/8	2.50/0.62	DGT6A0M82 (rh) DGT6A0M92 (lh)	P3M6B23KA0
	52.700	42.100			112K2L	2 with inv.	3.20		P3M6B21KA0
63/16	2.600	2.080	125	024	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2A43KA0
	3.250	2.600			71K2L	2 with inv.	0.50		P0M2A41KA0
	3.250	2.600			80K3C	2/8	0.50/0.12		P1M3A43AA0
	4.095	3.276		124	80K3L	2/8	0.63/0.15	DGT1A0M30	P1M3A43KA0
	5.200	4.160			80K2L	2 with inv.	0.80		P1M3A41KA0
	5.000	4.000	160	123	80K3L	2/8	0.63/0.15	DGT2A0M30	P1M3A33KA0
	6.300	5.000			80K2L	2 with inv.	0.80		P1M3A31KA0
	6.000	4.800			80K3L	2/8	0.63/0.15		P1M3A23KA0
	7.600	6.000		122	80K2L	2 with inv.	0.80	DGT3A0M10	P1M3A21KA0
	12.000	9.600			100K3C	2/8	1.25/0.31		P2M5A43AA0
	14.700	12.000	200	224	100K3L	2/8	1.60/0.39	DGT3A0M30	P2M5A43KA0
	6.900	5.500			80K3L	2/8	0.63/0.15		P1M3A13KA0
	8.600	6.900			80K2L	2 with inv.	0.80		P1M3A11KA0
	13.500	10.800		223	100K3C	2/8	1.25/0.31	DGT4A0M12	P2M5A33AA0
	17.200	13.800			100K3L	2/8	1.60/0.39		P2M5A33KA0
	21.600	17.200	250	222	100K2L	2 with inv.	2.00	DGT4A0M32	P2M5A31KA0
	14.600	11.700			100K3C	2/8	1.25/0.31		P2M5A23AA0
	18.700	14.900			100K3L	2/8	1.60/0.39		P2M5A23KA0
	23.400	18.700		334	100K2L	2 with inv.	2.00	DGT5A0M12 (rh) DGT5A0M22 (lh)	P2M5A21KA0
	29.300	23.500			112K3L	2/8	2.50/0.62		P3M6B43KA0
	29.400	29.400	315	333	112K2L	2 with inv.	3.20	DGT5A0M32 (rh) DGT5A0M42 (lh)	P3M6B41KA0
	16.400	13.100			100K3C	2/8	1.25/0.31		P2M5A13AA0
	21.000	16.800			100K3L	2/8	1.60/0.39		P2M5A13KA0
	32.800	26.200		221	112K3L	2/8	2.50/0.62	DGT6A0M12 (rh) DGT6A0M22 (lh)	P2M5A13AA0
	42.000	33.600			112K2L	2 with inv.	3.20		P3M6B33KA0
	32.800	26.200	400	333	112K3L	2/8	2.50/0.62	DGT6A0M32 (rh) DGT6A0M42 (lh)	P3M6B31KA0
	42.000	33.600			112K2L	2 with inv.	3.20		P3M6B31KA0
	32.800	26.200	400 R	333	112K3L	2/8	2.50/0.62	DGT6A0M82 (rh) DGT6A0M92 (lh)	P3M6B33KA0
	42.000	33.600			112K2L	2 with inv.	3.20		P3M6B31KA0

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in red require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

TRAVELLING MASSES AT 2 SPEEDS, BASED ON THE COMBINATION OF COMPONENTS

NOMINAL SPEED	TRAVELLING MASS (kg) ISO SERVICE GROUP (FEM)		"DGT" WHEEL GROUP	"DGP" GEARED-MOTORS		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
	M4 (1Am)	M5 (2m)		REDUCER TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
80/20	2.500	2.000	160	024	71K3L	2/8	0.40/0.09	DGT2A0M10	P0M2A43KA0
	3.200	2.500			71K2L	2 with inv.	0.50		P0M2A41KA0
	3.200	2.500			80K3C	2/8	0.50/0.12		P1M3A43AA0
	4.000	3.200		124	80K3L	2/8	0.63/0.15	DGT2A0M30	P1M3A43KA0
	5.000	4.000			80K2L	2 with inv.	0.80		P1M3A41KA0
	5.400	4.300			80K3L	2/8	0.63/0.15		P1M3A23KA0
	6.900	5.500	250	122	80K2L	2 with inv.	0.80	DGT4A0M12	P1M3A21KA0
	10.800	8.600			100K3C	2/8	1.25/0.31		P2M5A43AA0
	13.500	10.800			100K3L	2/8	1.60/0.39		DGT4A0M32
	17.200	13.800		100K2L	2 with inv.	2.00	P2M5A41KA0		
	16.500	13.200		222	100K3L	2/8	1.60/0.39	DGT6A0M12 (rh)	
	20.600	16.500			100K2L	2 with inv.	2.00	DGT6A0M22 (lh)	P2M5A21KA0
	25.800	20.600	334		112K3L	2/8	2.50/0.62	DGT6A0M32 (rh)	P3M6B43KA0
	33.000	26.400		112K2L	2 with inv.	3.20	DGT6A0M42 (lh)	P3M6B41KA0	
	33.600	26.900		400 R	334	112K2L	2 with inv.	3.20	DGT6A0M82 (rh) DGT6A0M92 (lh)

The specifications refer to a single geared-motor; in case of two or more geared-motors, multiply the travelling mass by the number of geared-motors used. Verify that in relation to the rail's running surface width (b), average reaction (R ave) is compatible with the values listed in diagram pages 12, 13 and 14. The values for travelling mass in **red** require a verification of average reaction (R ave.) on each wheel, which must not exceed the following Rx. max. values:

Ø 125 R ave. ≤ Rx max. ≤ 3.670 kg (36 kN)	Ø 160 R ave. ≤ Rx max. ≤ 4.893 kg (48 kN)	Ø 200 R ave. ≤ Rx max. ≤ 7.340 kg (72 kN)	Ø 250 R ave. ≤ Rx max. ≤ 10.805 kg (106 kN)	Ø 315 R ave. ≤ Rx max. ≤ 14.679 kg (144 kN)	Ø 400 R ave. ≤ Rx max. ≤ 18.960 kg (186 kN)	Ø 400 R R ave. ≤ Rx max. ≤ 30.580 kg (300 kN)
--	--	--	--	--	--	--

SAMPLE GUIDELINES FOR SELECTING DRIVE UNITS FOR CRANES

To make the correct choice of drive unit, firstly establish all operating parameters which determine its operating limitations, defining and/or verifying the following factors (see sample guidelines for various "limit" cases listed below, purely by way of example):

1. Define operating data: nominal load, running speed (1 or 2 speed) and ISO service group (FEM);
2. Define: the mass (weight) of the crane or trolley in question and any accessories (frame, electrical system, etc.);
3. Define: in the case of a crane, the weight of the hoist/trolley or trolley/winch, or any movable masses (blocks, etc.) in the case of trolleys;
4. Calculate: the total mass to be traversed, i.e. the nominal load + all equipment masses (weight of crane, trolley, etc.);
5. Define: the no. of motor drive units, necessities for the running of the total mass to be travelled;
6. Calculate: the mass each drive wheel must travel (i.e. the ratio between the total mass and the no. of wheel drive groups);
7. Verify: the maximum, minimum and average reactions on the wheels, considering the load approach/eccentricities;
8. Verify: the congruency of the rail running surface width, in relation to the type of rail on which the wheels will run on.

1st Example: Single girder crane - Capacity 5 t - Span 16 m

1. nominal load P = 5000 kg; 2 crane running speeds = 40/10 m/min; ISO service group M4 (FEM 1Am)
2. weight of crane + accessories: M1 ≈ 2500 kg
3. weight of hoist + trolley: M2 ≈ 500 kg
4. total mass to travel: 5000 + 2500 + 500 = 8000 kg
5. Motor drive units: no. 2
6. mass to travel for each motor drive wheel: 8000 / 2 = 4000 kg

Based on the selected speed and calculation of mass to be travelled for each drive wheel, derive the following components from the table on page 33:

NOMINAL SPEED (m/min)	TRAVELLING MASS (kg) IN SERVICE GROUP ISO M4 (FEM 1Am) IS IN kg	"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTOR		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
			GEARED-MOTOR TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
40/10	4.200 > di 4.000 to be traversed	125	022	71K3L	2/8	0.40/0.09	DGT1A0M10	P0M2A23KA0

At this point, verify the suitability of the Ø 125 wheel selected, in relation to its admissible reactions and type of rail:

7. reactions on the wheels, calculated as illustrated on page 12, for gauge "S" = 16,000 mm and supposing an approach "a" = 1000 mm:
 $R_{max} = 2.500/4 + [(500 + 5.000)/2] \cdot (1 - 1.000/16.000) \approx 3.203 \text{ kg}$
 $R_{min} = 2.500/4 + 500/2 \cdot 1.000/16.000 \approx 641 \text{ kg}$
 $R_{ave} = (2 \cdot R_{max} + R_{min})/3 = (2 \cdot 3.203 + 641)/3 \approx 2.349 \text{ kg} < 3.670 \text{ kg}$, corresponding to max. R admissible
8. supposing a flat laminated rail, with l = 40 and a running surface b = 38 (see table on page 11), from the diagram on page 12 we can deduce that, for a Ø 125 wheel with a **standard sheave** width, considering the factors (speed and rail running surface), the average admissible reaction for service group M4 (1Am) is:
 $R_{ave. admissible} \approx 2400 \text{ kg} > \text{of the } 2349 \text{ kg}$ the wheel is subject to.

2nd Example: Double girder crane - Capacity 10 t - Span 20 m

1. nominal load P = 10.000 kg; 2 crane sliding speeds = 40/10 m/min; ISO service group M4 (FEM 1Am)
2. weight of crane + accessories: M1 ≈ 5,900 kg
3. weight of hoist + trolley: M2 ≈ 750 kg
4. total mass to travel: 10,000 + 5,900 + 750 = 16,650 kg
5. Motor drive units: no. 2
6. mass to travel for each motor drive wheel: 16,650 / 2 = 8325 kg

Based on the selected speed and calculation of mass to be traversed for each drive wheel, derive the following components from the table on page 33:

NOMINAL SPEED (m/min)	MASSA TRASLABILE (kg) GRUPPO DI SERVIZIO ISO M4 (FEM 1Am) È DI kg	"DGT" WHEEL GROUP Ø (mm)	"DGP" GEARED-MOTOR		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
			GEARED-MOTOR TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
40/10	9.400 > di 8.325 da traslare	200	134	80K3L	2/8	0.63/0.15	DGT3A0M10	P1M3B43KA0

At this point, verify the suitability of the Ø 200 wheel selected, in relation to its admissible reactions and type of rail:

7. reactions on the wheels, calculated as illustrated on page 12, for gauge "S" = 20000 mm and supposing a juxtaposition "a" = 1000 mm:
 $R_{max} = 5.900/4 + [(750 + 10.000)/2] \cdot (1 - 1.000/20.000) \approx 6.581 \text{ kg}$
 $R_{min} = 5.900/4 + 750/2 \cdot 1.000/20.000 \approx 1.494 \text{ kg}$
 $R_{ave} = (2 \cdot R_{max} + R_{min})/3 = (2 \cdot 6.581 + 1.494)/3 \approx 4.885 \text{ kg} < 7.340 \text{ kg}$, corresponding to the admissible R max.
8. supposing a flat laminated rail, with l = 50 and operating band b = 48 (see table on page 11), from the diagram on page 13 we can deduce that, for a Ø 200 wheel with a **standard sheave** width, considering the factors (speed and operating bandwidth), the average admissible reaction for the service group M4 (1Am) is:
 $R_{ave. admissible} \approx 5.500 \text{ kg} > \text{of the } 4.885 \text{ kg}$ the wheel is subject to.

3rd Example: Trolley for winch - Capacity 40 t – Gauge 2.4 m

1. nominal load $P = 40.000$ kg; 2 trolley running speeds = 20/5 m/min; ISO service group M5 (FEM 2m)
2. weight of crane + accessories: $M1 \approx 2.600$ kg
3. weight of block + ropes: $M2 \approx 400$ kg
4. total mass to travel: $40.000 + 2.600 + 400 = 43.000$ kg
5. motor drive units: $n^\circ 2$
6. mass to travel for each drive wheel: $43.000 / 2 = 21.500$ kg

Based on the selected speed and calculation of mass to be travelled for each drive wheel, derive the following components from the table on page 32:

NOMINAL SPEED (m/min)	TRAVELLING MASS (kg) IN SERVICE GROUP ISO M5 (FEM 2m) IS IN kg	"DGT" WHEEL GROUP	"DGP" GEARED-MOTOR		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
		Ø (mm)	GEARED-MOTOR TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
20/5	21.600 > di 21.500 to be traversed	250	232	80K2L	2 con inverter	0.80	DGT4A0M32	P2M3B2IKA0

At this point, verify the suitability of the Ø 250 wheel selected, in relation to its admissible reactions and type of rail:

7. reactions on the wheels, calculated as illustrated on page 12, for gauge "S" = 2.400 mm and supposing the centred hook "a" = 1.200 mm:
 $R_{max} = 2.600/4 + [(400 + 40.000)/2] \cdot (1 - 1.200/2.400) \approx 10.750$ kg
 $R_{min} = 2.600/4 + 400/2 \cdot 1.200/2.400 \approx 750$ kg
 $R_{ave} = (2 \cdot R_{max} + R_{min})/3 = (2 \cdot 10.750 + 750)/3 \approx 7.417$ kg < 10.805 kg, corresponding to max. R admissible
8. supposing a flat laminated rail, with $l = 60$ and operating band $b = 58$ (see table on page 11), from the diagram on page 13 we can deduce that, for a Ø 250 wheel with a **standard sheave** width, considering the factors (speed and rail running surface), the average admissible reaction for the service group M5 (2m) is:
 $R_{ave. admissible} \approx 8.300$ kg > of the 7.417 the wheel is subject to.

4th Example: Gantry crane - Capacity 40 t - Span 27 m

1. nominal load $P = 40.000$ kg; 2 crane running speeds = 32/8 m/min; service group ISO M5 (FEM 2m)
2. weight of crane + accessories: $M1 \approx 27.000$ kg
3. Weight of trolley + hoist: $M2 \approx 3.000$ kg
4. total mass to travel: $40.000 + 27.000 + 3.000 = 70.000$ kg
5. motor drive units: no. 2
6. mass to travel for each drive wheel: $70.000 / 2 = 35.000$ kg

Based on the selected speed and calculation of mass to be travelled for each drive wheel, derive the following components from the table on page 33:

NOMINAL SPEED (m/min)	TRAVELLING MASS (kg) IN SERVICE GROUP ISO M5 (FEM 2m) IS IN kg	"DGT" WHEEL GROUP	"DGP" GEARED-MOTOR		SELF-BRAKING MOTOR SPECS		CODES FOR COMPONENTS	
		Ø (mm)	GEARED-MOTOR TYPE	MOTOR TYPE	POLES (N°)	POWER (kW)	"DGT" DRIVE WHEEL GROUP	"DGP" GEARED-MOTOR
32/8	41.300 > 35.000 to be traslated	400 R	232	100K2L	2 con inverter	2.00	DGT6A0M62 (rh) DGT6A0M72 (lh)	P2M5B2IKA0


At this point, verify the suitability of the Ø 400 wheel selected, in relation to its admissible reactions and type of rail:

7. reactions on the wheels, calculated as illustrated on page. 12, for span "S" = 27.000 mm nd supposing a position "a" = 1.500 mm:
 $R_{max} = 27.000/4 + [(3.000 + 40.000)/2] \cdot (1 - 1.500/27.000) \approx 27.056$ kg
 $R_{min} = 27.000/4 + 3.000/2 \cdot 1.500/27.000 \approx 6.834$ kg
 $R_{ave} = (2 \cdot R_{max} + R_{min})/3 = (2 \cdot 27.056 + 6.834)/3 \approx 20.315$ kg < 30.580 kg, corresponding to max R admissible
8. supposing a flat laminated rail, with $l = 100$ and operating band $b = 98$ (see table on page 11), from the diagram on page 14 we can deduce that, for a Ø 400 R with **special sheave** width, considering the factors (speed and rail running surface), the average admissible reaction for the service group M5 (2m), is:
 $R_{ave. admissible} \approx 20.550$ kg > of the 20.315 kg the wheel is subject to.


ACCESSORY COMPONENT OF THE BRIDGE CRANE END-CARRIAGES

GUIDE ROLLS


- 1: Load-bearing frame
2: Idle pin bearing



- Layout A:
A1: Idle pin bearing support
A2: Idle pin eccentric

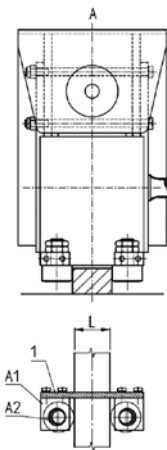

- Layout B:
B1: Idle pin bearing support
B2: Idle pin eccentric

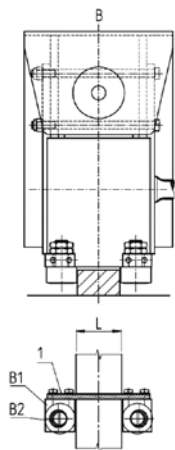

DGT	CODE	WHEEL BOX PERFORATION (mm)				TRACK WIDTH L (mm)			
						LAYOUT A		LAYOUT B	
		X	Y	Z	Ø	MIN	MAX	MIN	MAX
1	DGT1A0F10	52	50	63	9	35	45	50	60
2	DGT2A0F10	70	50	77	11	40	50	55	65
3	DGT3A0F10	85	60	96	13	45	55	60	70
4	DGT4A0F10	100	80	116	13	55	65	70	80
5	DGT5A0F10	122,5	75	141	17	60	70	75	85
6	DGT6A0F10	152	80	178	21	70	80	85	95

DONATI WEBSITE

Donati's window on the world for customer service.

Manuals and product information

The new Donati website has been designed to assist customers so they can easily find all of the updated information on Donati products at any time.

The Donati website makes it simple to consult and download product catalogues, technical manuals and product information sheets.



Donati Shop

The Donati Shop makes it possible to quickly and independently handle spare parts requests, thus reducing waiting times for customers.

Contact Section

The new contact section divided by departments lets you address your requests to the right team, so our staff can provide a faster and more accurate answer.

LEONARDO CONFIGURATION SYSTEM



Leonardo Configuration System is the Donati configurator system lets you configure and generate offers for Chain hoists, Jib cranes and Crane sets, easily and quickly; it lets you rapidly and efficiently respond to your customers' requests.

The suite is composed of two configurators:

Leonardo Product Configurator:

Used to configure chain hoists and jib cranes alone or in combination

Leonardo Crane Set Configurator:

Used to configure bridge cranes complete with all necessary accessories and Donati hoists.



visit donaticranes.com
and keep up to date

MKCT20ENTO

Donati Sollevamenti S.r.l.

Via Archimede, 45/47
20864 Agrate Brianza (MB) - Italy
Tel +39 0331 14811
Fax +39 0331 1481880

dvo.info@donaticranes.com
www.donaticranes.com